



# **Files**Table of contents

# PFERD

General information		3
Well packed and presented		4
The fast way to the best tool		5
The most common PFERD cuts and te	eth	6
PFERD quality, number of cuts		7
Files		
	Files for the workshop	
	■ Machinist's files, DIN series	8
	□ Special files □ Key files	14 18
	■ Tungsten point files	21
	Car body files	
	Adjustable holders for car body files	22
	☐ Car body file blades☐ Car body files, tanged type☐	23 23
	Milled tooth files	
	Paint peeler	24
	■ Universal chamfer file ■ Milled tooth files, tanged type	24 25
	■ Milled tooth file blades	26
	■ Holders for file blades	26
0 0	Tungsten carbide files	
	■ Tungsten carbide files ■ Holders for tungsten carbide files	27 27
	Sharpening files	
	■ Three square saw files	28
	<ul><li>Knife sharpening files</li><li>Featheredge files</li></ul>	30 30
	■ Mill saw files	31
	Chain saw files Chain saw sharpeners	32 35
	■ Chain saw sha peners ■ Depth gauge files	37
- в	Wood files and rasps	
	Wood files Wood rasps	38 39
	■ Hoof plane and horse rasps	41
	Special rasps Needle rasps	42 43
	Precision files	
	Tang files	45
	CORINOX files CORINOX needle files	46 47
	■ Needle files	48
	■ Handy files ■ Riffler files, riffler rasps	50 51
	the contract of the contract o	



#### **Accessories**





Fil	e l	hand	les, f	file	sleeves,	file	brush
	_		, .		5.00.007		

#### **Hand deburrer**





#### **Hand deburrer**

■ Hand deburrer

59

56

57

57 57

58



File sets can be found on the pages of the individual product groups.



Detailed information and ordering data for diamond files can be found in catalogue section 5.



All tools and more information: www.pferd.com

#### Quality

For 200 years, PFERD has been manufacturing files of a world-renowned high quality. The experience gained over many years as a tool manufacturer is constantly used for the development of PFERD files.

Application-oriented file shapes and cuts for industry and crafts guarantee good economic value. Even after long use, PFERD files achieve high stock removal rates and an excellent surface quality. State-of-the-art production technology and strict quality controls guarantee the outstanding PFERD quality.

PFERD is certified according to ISO 9001.



#### PFERDVALUE - Your added value with PFERD

Results from the PFERD test laboratories as well as from the product tests by independent testing institutes prove: PFERD tools offer measurable added value.

Discover **PFERD**ERGONOMICS and **PFERD**EFFICIENCY:

As part of **PFERD**ERGONOMICS, PFERD offers ergonomically optimized tools and tool drives that contribute to greater safety and working comfort, and thus to health protection.











As part of **PFERD**EFFICIENCY, PFERD offers innovative, high-performance tool solutions and tool drives with outstanding added value.









For more information on this topic, please refer to our brochure "PFERDVALUE -Your added value with PFERD".



#### **PFERD**PRAXIS brochures

Our PFERDPRAXIS brochures contain a wealth of useful information on material properties as well as tips and tricks for using PFERD tools on specific materials.

You can find information on the maintenance and care of a saw chain and on the repair of other forestry tools in the "PFERD tools for forestry" PRAXIS FOCUS brochure.









# **Files**Well packed and presented





#### **PFERD** industrial packaging

PFERD files in industrial packaging are traditionally rolled in paper which protects them against corrosion. Depending on file length, they are packed in packaging units of 5 or 10 pieces (except chain saw files and precision files).

These files are delivered without a handle. They are therefore suitable for experienced users who have their own handles or who would like to purchase these separately according to their individual needs.

#### Advantages:

- Robust, corrosion- and damage-resistant packaging.
- Easier selection of the optimum file thanks to the colour coding system for fast cut selection.
- Packaging labels with all the important information at a glance.



#### Point-of-sale packaging

PFERD also offers many of its products in sales-boosting point-of-sale packaging. It is designed to perfectly present the products at the **PFERD**TOOL-CENTER.

#### Advantages:

- Attractive design.
- Fixture to mount the products on the sales stand.
- Optimal protection against corrosion and damage.



#### **PFERD**TOOL-CENTER

On the TOOL-CENTER, the point of sale from PFERD, you will find all the important information required for selecting the most appropriate tool. Your local retailer or PFERD sales adviser will be glad to answer any questions you might have.

#### Advantages

- Individual planning on a needs-driven basis.
- Eye-catching and intuitively designed.



Application	Material	Applications	Tool	Page
Filing	Steel Stainless steel (INOX) Cast iron	<ul><li>Chamfering</li><li>Deburring</li><li>Roughing</li><li>Finishing</li></ul>	Files for the workshop	8
	Cast steel Non-ferrous metals Copper	Surface work Filing of breakthroughs	Soft metal files	16
	■ Bronze ■ Brass ■ Zinc		Milled tooth files	25
			Precision files	44
			Tungsten carbide files	27
Sharpening	<ul><li>Saw chains</li><li>Saw blades</li><li>Band saw blades</li><li>Knives</li></ul>	Sharpening of saw chains, blades, and band saw blades	Chain saw files	32
	■ Machetes		Three square saw files	28
			Mill saw files	31
			Chain saw sharpeners CHAIN SHARP	35
Car body work	<ul><li>Sheet metal</li><li>Non-ferrous metals</li><li>Plastics</li></ul>	<ul><li>Surface work</li><li>Deburring</li><li>Removal of solder spots</li><li>Removal of weld spots</li></ul>	Car body files	23
		<ul><li>Removal of thin paint layers</li><li>Correction of painting faults</li></ul>	Paint peeler	24
Soft material work	<ul><li>■ Wood</li><li>■ Plastics</li><li>■ Soft stone</li><li>■ Horn</li></ul>	<ul><li>Roughing</li><li>Finishing</li><li>Surface work</li><li>Deburring</li></ul>	Wood files	38
		■ Chamfering	Wood rasps	39
			Hoof plane and horse rasps	41
			Special rasps	42

### **Files**

#### The most common PFERD cuts



#### Files for the workshop

# Cut 1

- Cross cut.
- Suitable for coarse stock removal and for roughing.

Cut 2



- Cross cut.
- Suitable for universal roughing and finishing.

Cut 3



- Cross cut.
- Suitable for fine processing and finishing.

#### **Sharpening files**

#### Classic



- Classic spiral cut.
- For users who prefer an aggressive filing action.

#### **Premium**



- Innovative spiral cut.
- For users who prefer a softer filing action.


#### Single cut Cut 2



- Single cut.
- Universally suited to sharpening.

#### Car body files

#### Cut 00




- Radial cut
- Suitable for very coarse stock removal and for roughing.
- Creates score-free surfaces.

Cut 0




- Radial cut.
- Suitable for coarse stock removal and for roughing.
- Creates score-free surfaces.

Cut 1



- Radial cut.
- Suitable for coarse stock removal and for roughing.
- Creates score-free surfaces.

Cut 2




- Radial cut
- Suitable for universal roughing and finishing.
- Creates score-free surfaces.

Cut 3

Cut 1

Cut 2

Milled tooth files



■ Radial cut.

Straight cut.

on soft metals.

not clog up.

Straight cut.

Suitable for fine stock removal and finishing.

■ Suitable for coarse stock removal

Because of its milled tooth shape with large flutes, the teeth do

■ Suitable for universal roughing

and finishing on soft metals. Because of its milled tooth shape with large flutes, the teeth do

Creates score-free surfaces.


#### Rasps





- Rasp cut.
- Suitable for coarse stock removal and for roughing.

#### Cut 2



- Rasp cut.
- Suitable for universal roughing and finishing.

#### Cut 3




- Rasp cut.
- Suitable for fine processing and finishing.

#### Cut 00



**Precision files** 



- Cross cut.
- Suitable for very coarse precision work.

#### Cut 0



- Cross cut.
- Suitable for coarse precision work

#### Cut 1



- Cross cut.
  - Suitable for medium precision work.



- Cross cut.
  - Suitable for medium to fine precision work.

#### Cut 3



- Suitable for fine precision work.

#### Cut 3



- not clog up. Straight cut.
- Suitable for fine stock removal on soft metals.
- Because of its milled tooth shape with large flutes, the teeth do not clog up.





- Cross cut.
- Suitable for very fine precision work.



#### Several criteria determine PFERD quality




#### Uniform hardness through flawless steel microstructure

The profiling in the rolling mill, the forging of shape and tang, the annealing prior to cutting and the heat treatment each cause a change in the steel microstructure. The high carbon content of the steel microstructure determines the hardness and cutting performance of the file and must therefore be maintained.



## Exact shape and uniform cut from tang

The file blanks acquire their exact shape through forging and grinding. This enables accurate work. Equally spaced cuts and a uniform depth of cut ensure good filing performance and good surface finishes. The type and angle of the cut depend on the purpose for which the file is intended.



#### Perfectly milled tooth geometries for every application

Tooth shapes suited to various applications ensure the best stock removal rate. There is no universally appropriate tooth shape for every application. PFERD has developed the optimally suitable tooth shapes and tooth geometries for each of the various applications. The figure shows a car body file tooth with its typical rounded tooth face and large flute.


#### Number of cuts for cut files [cuts/cm] according to DIN 8349

Length (without	-	Machinist's file	~	Sharpening files number of cuts ± 5 %								
tang)	Cut 1-B	Cut 2	Cut 3-S	Regular	Slim	Extra	Double	Mill sav	w files			
[mm]	Bastard	Half-smooth	Smooth	negulai	Jiiii	slim	extra slim	Cut 1	Cut 2			
100	17	22	28	20	23	26	_	-	_			
125	-	-	-	19	22	24	25	-	-			
150	13	18	22	17	20	22	24	20	24			
175	_	-	_	16	19	21	23	_	-			
200	10	14	18	15	17	20	22	18	20			
250	9	12	16	14	16	17	-	16	18			
300	8	11	14	-	_	-	-	14	16			
350	7	10	13	-	-	-	-	12	14			

#### Determining the number of cuts:

The numbers of cuts for PFERD files conform to DIN 8349 requirements.


The number of cuts for a file is the number of scores (cuts) per cm of file length, counted along the file axis. For cross cut files, the number of cuts is determined by the upper cut.



#### Example:

At a length of 250 mm, a cut 1 file has 9 teeth/cm. A 100 mm long cut 1 file has 17 teeth/cm of file length, however. The higher number of teeth found on shorter files is intended to provide the same ease of use (in terms of force input, guidability and stock removal rate) on surfaces and edges as for a longer file.

#### **Dimensions:**



The cross-sectional dimensions indicated in the tables are measured across the cut and may vary depending on cut type. For tapered files the cut is measured at the highest and widest

PFERD files are manufactured in compliance with DIN and ISO standards.

#### Colour code for the file cut

The different colours used for the cuts available allow rapid tool selection.

Cut 1	Cut 2	Cut 3		
green = coarse	yellow = medium	red = fine		
10 Hand Planas paralelas	10 Hand	10 Hand Planas paralelas		
Planas paralelas	Planas paralelas	Planas paralelas		

#### Overview of file designations according to DIN

Designation	Shape symbol	Designation according to DIN 7261					
Hand		1112	А				
Flat	#####	1122	В				
Three square	Δ	1132	С				
Square		1142	D				
Half-round		1152	E				
Round	0	1162	F				
Knife files	Ciril	1172	G				
Lathe files		1612 DE	Н				

### Machinist's files, DIN series



PFERD produces files for the workshop with the highest quality standards. They achieve a long service life and high stock removal rates. Three application-oriented cuts are available.

#### **Advantages:**

- Consistently high stock removal rate from the tip to the tang.
- Long service life.
- Application-oriented design.
- Half-round and round versions with outstanding filing performance thanks to PFERD spiral cut.

#### **Recommendations for use:**

- Choose cut 1 for roughing or coarse stock removal
- Choose cut 2 for universal use.
- Choose cut 3 for fine processing and finishing.

Dungfile Lementh Lementh

#### Materials that can be worked:

- Aluminium
- Bronze
- Copper
- Brass
- Zinc
- Grey cast iron
- Steels up to 1,200 N/mm²
- Cast steel

#### **Applications:**

- Deburring
- Surface work
- Work on edges (chamfering, rounding)

#### **Ordering notes:**

PFERD files for the workshop are available in industrial packaging without handle or in POS packaging with ergonomic file handle.

#### **Matching accessories:**

■ You can find matching ergonomic file handles and other PFERD handles on page 56.



#### **PFERD**VALUE:

**PFERD**ERGONOMICS recommends the ergonomic file handle for comfortable work.



#### Hand (1112)

Rectangular file, cut on three sides, one side uncut. Version with tang. Shape A according to DIN 7261. Suitable for filing rectangular geometries.

#### Ordering notes:

■ Please specify the desired cut.



Profile Length		Length				Cross	Matching	Incl.	$\supset$	Description	
	[mm]	[inch]	1	2	3	3 section [mm]	handle	handle			
			E	AN 400722	0						
Industrial packaging (without handle)											
1112	100	4	005606	005613	005620	12.0 x 2.5	FH 2	-	10	1112 100 H	
	150	6	005637	005644	005651	16.0 x 4.0	FH 3	-	10	1112 150 H	
	200	8	005668	005675	005682	20.0 x 5.0	FH 4/1	-	10	1112 200 H	
	250	10	005699	005705	005712	25.0 x 6.0	FH 4/1	-	10	1112 250 H	
	300	12	005729	005736	005743	30.0 x 6.5	FH 5/1	-	5	1112 300 H	
	350	14	005750	005767	-	35.0 x 7.5	FH 5/1	-	5	1112 350 H	
POS packa	ging (with	handle)									
1112	150	6	541388	541432	541463	16.0 x 4.0	-	FH 3	5	PF 1112 150 H	
	200	8	541494	541524	541555	20.0 x 5.0	-	FH 4/1	5	PF 1112 200 H	
	250	10	541586	541623	541647	25.0 x 6.0	-	FH 4/1	5	PF 1112 250 H	
	300	12	541661	541678	541685	30.0 x 6.5	-	FH 5/1	5	PF 1112 300 H	





Machinist's files, DIN series

#### Flat (1122)

Rectangular file, tapered and cut on four sides. Version with tang. Shape B according to DIN 7261. Suitable for filing rectangular geometries.

#### Ordering notes:

■ Please specify the desired cut.

#### PFERDVALUE:



Profile	Length	Length	ength Cut			Cross	Matching	Incl.	$   \equiv $	Description	
	[mm]	[inch]	1	2	3	section [mm]	handle	handle			
			E	AN 400722	0						
Industrial	Industrial packaging (without handle)										
1122	100	4	005811	005828	005835	12.0 x 2.5	FH 2	-	10	1122 100 H	
	150	6	005842	005859	005866	16.0 x 4.0	FH 3	-	10	1122 150 H	
	200	8	005873	005880	005897	20.0 x 5.0	FH 4/1	-	10	1122 200 H	
	250	10	005903	005910	005927	25.0 x 6.0	FH 4/1	-	10	1122 250 H	
	300	12	005934	005941	005958	30.0 x 6.5	FH 5/1	-	5	1122 300 H	
	350	14	005965	-	-	35.0 x 7.5	FH 5/1	-	5	1122 350 H	
POS packa	ging (with	handle)									
1122	150	6	669341	669358	669365	16.0 x 4.0	-	FH 3	5	PF 1122 150 H	
	200	8	669372	669389	669396	20.0 x 5.0	-	FH 4/1	5	PF 1122 200 H	
	250	10	669402	669419	669426	25.0 x 6.0	-	FH 4/1	5	PF 1122 250 H	
	300	12	669433	669440	669457	30.0 x 6.5	-	FH 5/1	5	PF 1122 300 H	

#### Three square (1132)

Triangular file, tapered and cut on three sides. Version with tang. Shape C according to DIN 7261. Suitable for filing angular profiles.





#### Ordering notes:

■ Please specify the desired cut.



Profile	Length [mm]	5				Cross	Matching	Incl.	$\blacksquare$	Description	
		[inch]	1 E	2 AN 400722	3 0	section [mm]	handle	handle			
Industrial packaging (without handle)											
1132	100	4	006603	006610	006627	8.0	FH 2	-	10	1132 100 H	
	150	6	006641	006658	006665	11.0	FH 3	-	10	1132 150 H	
	200	8	006672	006689	006696	13.0	FH 4	-	10	1132 200 H	
	250	10	006702	006719	006726	15.5	FH 5	-	10	1132 250 H	
	300	12	006733	006740	-	18.0	FH 5	-	5	1132 300 H	
POS packa	ging (with	handle)									
1132	150	6	541692	541708	541715	11.0	-	FH 3	5	PF 1132 150 H	
	200	8	541722	541739	541746	13.0	-	FH 4	5	PF 1132 200 H	
	250	10	541753	541760	-	15.5	-	FH 5	5	PF 1132 250 H	

Machinist's files, DIN series





#### **Square (1142)**

Square file, tapered and cut on four sides. Version with tang. Shape D according to DIN 7261. Suitable for filing angular profiles.

#### Ordering notes:

■ Please specify the desired cut.

PFERDVALUE:



Profile	Length	th Length	Cut			Cross		Incl.	$\Longrightarrow$	Description
	[mm]	[inch]	1	2 AN 400722	3	section [mm]	handle	handle		
Industrial packaging (without handle)										
		_	-	000010	000022	4.0	ELL 3		10	1142 100 11
1142	100	4	006009	006016	006023	4.0	FH 2	-	10	1142 100 H
	150	6	006030	006047	006054	6.0	FH 3	-	10	1142 150 H
	200	8	006061	006078	006085	8.0	FH 4	-	10	1142 200 H
	250	10	006092	006108	006115	10.0	FH 4	-	10	1142 250 H
	300	12	006122	006139	-	12.0	FH 5	-	5	1142 300 H
POS packa	ging (with	handle)								
1142	150	6	541777	541784	-	6.0	-	FH 3	5	PF 1142 150 H
	200	8	541791	541807	-	8.0	-	FH 4	5	PF 1142 200 H
	250	10	541814	541838	-	10.0	-	FH 4	5	PF 1142 250 H





Half-round file, cut on two sides. Version with tang. Shape E according to DIN 7261. Suitable for work on radii and for filing of half-round shapes.

#### Ordering notes:

■ Please specify the desired cut.



Profile	Length	Length Length		Cut		Cross	Matching	Incl.	$\Longrightarrow$	Description
	[mm]	[inch]	1	2	3	section [mm]	handle	handle		
			E	AN 400722	.0					
Industrial packaging (without handle)										
1152	150	6	006207	006214	006221	16.0 x 4.5	FH 3	-	10	1152 150 H
	200	8	006238	006245	006252	20.0 x 6.0	FH 4/1	-	10	1152 200 H
	250	10	006269	006276	006283	25.0 x 7.0	FH 4/1	-	10	1152 250 H
	300	12	006290	006306	006313	30.0 x 8.5	FH 5/1	-	5	1152 300 H
	350	14	006320	-	-	35.0 x 10.0	FH 5/1	-	5	1152 350 H
POS packa	ging (with	handle)								
1152	150	6	541845	541852	541869	16.0 x 4.5	-	FH 3	5	PF 1152 150 H
	200	8	541876	541883	541890	20.0 x 6.0	-	FH 4/1	5	PF 1152 200 H
	250	10	541906	541920	541937	25.0 x 7.0	-	FH 4/1	5	PF 1152 250 H
	300	12	541944	-	-	30.0 x 8.5	-	FH 5/1	5	PF 1152 300 H



Machinist's files, DIN series

#### Half-round pointed (1152 SP)

Half-round pointed file, cut on two sides. Version with tang. Shape E according to DIN 7261. Suitable for work on radii and for filing of half-round shapes.

#### Ordering notes:

■ Please specify the desired cut.

#### PFERDVALUE:



Profile	Length	Length		Cut			Matching	Incl.	$\blacksquare$	Description
	[mm]	[inch]	1	2	3	section [mm]	handle	handle		
			E	AN 400722	0					
Industrial	Industrial packaging (without handle)									
1152 SP	100	4	006160	006177	006184	10.4 x 2.5	FH 2	-	10	1152 SP 100 H
	150	6	006955	006962	006979	16.0 x 4.5	FH 3	-	10	1152 SP 150 H
	200	8	006986	006993	007006	20.0 x 6.0	FH 4/1	-	10	1152 SP 200 H
	250	10	007013	007020	007037	25.0 x 7.0	FH 4/1	-	10	1152 SP 250 H
	300	12	007044	007051	007068	30.0 x 8.5	FH 5/1	-	5	1152 SP 300 H
	350	14	222355	-	-	35.0 x 10.0	FH 5/1	-	5	1152 SP 350 H
POS packa	ging (with	handle)								
1152 SP	150	6	809877	809891	809907	16.0 x 4.5	-	FH 3	5	PF 1152 SP 150 H
	200	8	809914	809921	809938	20.0 x 6.0	-	FH 4/1	5	PF 1152 SP 200 H
	250	10	809952	809969	809976	25.0 x 7.0	-	FH 4/1	5	PF 1152 SP 250 H
	300	12	810002	810019	810026	30.0 x 8.5	-	FH 5/1	5	PF 1152 SP 300 H

#### **Round (1162)**

Round file with circumferential cut. Version with tang. Shape F according to DIN 7261. Suitable for work on radii and for filing profiles with inner radii.





#### Ordering notes:

■ Please specify the desired cut.



Profile	Length	Length		Cut		Cross	Matching	Incl.	$\Rightarrow$	Description
	[mm]	[inch]	1	2	3	section [mm]	handle	handle		
			E	AN 400722	0					
Industrial	packaging	(without h	andle)							
1162	100	4	006405	006412	006429	4.0	FH 2	-	10	1162 100 H
	150	6	006467	006474	006481	6.0	FH 3	-	10	1162 150 H
	200	8	006498	006504	006511	7.5	FH 4	-	10	1162 200 H
	250	10	006528	006535	006542	9.5	FH 4	-	10	1162 250 H
	300	12	006559	006566	006573	12.0	FH 5	-	5	1162 300 H
	350	14	006580	-	-	15.0	FH 5	-	5	1162 350 H
POS packa	ging (with	handle)								
1162	150	6	541951	541968	541982	6.0	-	FH 3	5	PF 1162 150 H
	200	8	541999	542002	542019	7.5	-	FH 4	5	PF 1162 200 H
	250	10	542026	542040	542057	9.5	-	FH 4	5	PF 1162 250 H
	300	12	542064	-	-	12.0	-	FH 5	5	PF 1162 300 H

Machinist's files, DIN series







#### Knife files (1172)

Triangular file with knife profile, cut on two sides and the narrow edge. Version with tang. Shape G according to DIN 7261. For work on very acute-angled and narrow geometries.

#### Ordering notes:

■ Please specify the desired cut.

Profile	Length	Length Length [mm] [inch]	Cut			Cross section	Matching	$\Longrightarrow$	Description
	[mm]		1	2	3	[mm]	handle		
				EAN 4007220	)				
Industrial p	ackaging (w	ithout handl	e)						
1172	150	6	-	006801	006818	16.0 x 5.2 x 1.25	FH 3	10	1172 150 H
	200	8	006825	006832	006849	20.0 x 6.4 x 1.5	FH 4	10	1172 200 H
	250	10	006856	006863	-	25.0 x 7.9 x 1.75	FH 4	10	1172 250 H





Rectangular file, cut on three sides, one edge uncut. Version with tang. Shape A according to DIN 7261. Outstanding filing performance thanks to the special PFERD-PLUS cut. Suitable for filing rectangular geometries.

#### Advantages:

- Easy and energy-saving working due to spade-like filing teeth.
- No clogging whilst processing soft materials thanks to a wide chip breaker.
- Can be used universally for all hobby and DIY purposes.



Profile	Length	Length	Cut	Cross	Incl.	$\longrightarrow$	Description
	[mm]	[inch]	PLUS-cut	section [mm]	handle		
			EAN 4007220				
POS packaging (	(with handle)						
1112	200	8	542071	20.0 x 5.0	FH 4/1	5	PF 1112 PLUS 200
	250	10	542095	25.0 x 6.0	FH 4/1	5	PF 1112 PLUS 250
	300	12	006948	30.0 x 6.5	FH 5/1	5	PF 1112 PLUS 300





Machinist's files, DIN series

# Machinist's files in plastic pouch WR, machinist's files in plastic pouch with cardboard box WRU

Quality files for industry and trade in a protective and climate-resistant PVC pouch for storage in a toolbox or on a workbench. Each file comes with an ergonomic file handle. PFERD also provides the plastic pouches with files that are 200 and 250 mm in length in attractive packaging with a transparent window.

#### Advantages:

- Suitable for a wide range of applications.
- Available on request with matching plastic pouch to save space when stored.

#### Ordering notes:

- Please specify the desired type.
- WR = machinist's files in plastic pouch
- WRU = machinist's files in plastic pouch with cardboard box

#### PFERDVALUE:







Length	Length	Ту	pe	Contents		Description	
[mm]	[inch]	WR	WRU				
		EAN 4	007220				
200	8	011409	807965	1112 200 H1, 1142 200 H1, 1152 200 H1, 1162 200 H1, 1552 200 H2	1	520 200	
		011416	807972	1112 200 H1, 1132 200 H1, 1142 200 H1, 1152 SP 200 H1, 1162 200 H1	1	531 200	
		011423	807989	1112 200 H2, 1132 200 H2, 1142 200 H2, 1152 SP 200 H2, 1162 200 H2	1	532 200	
		011430	807996	1112 200 H3, 1132 200 H3, 1142 200 H3, 1152 SP 200 H3, 1162 200 H3	1	533 200	
250	10	10	011447	808009	1112 250 H1, 1132 250 H1, 1142 250 H1, 1152 SP 250 H1, 1162 250 H1	1	541 250
			011454	808016	1112 250 H2, 1132 250 H2, 1142 250 H2, 1152 SP 250 H2, 1162 250 H2	1	542 250
		011461	808023	1112 250 H3, 1132 250 H3, 1142 250 H3, 1152 SP 250 H3, 1162 250 H3	1	543 250	
300	12	011478	-	1112 300 H1, 1132 300 H1, 1142 300 H1, 1152 SP 300 H1, 1162 300 H1	1	551 300	
		011485	-	1112 300 H2, 1132 300 H2, 1142 300 H2, 1152 SP 300 H2, 1162 300 H2	1	552 300	
200 / 300	8/12	011508	-	1112 200 H1, 1112 200 H2, 1112 200 H3, 1112 300 H1, 1112 300 H2, 1112 300 H3	1	555 200/300	

#### File set

Quality files designed to meet the needs of DIY users in a protective cardboard box. Precise files with a high stock removal rate and a long service life. Also suitable for sharpening. Each file comes with an ergonomic file handle.

#### Contents:

The set consists of one file each of

- PF 1512 VZ 200 H1/1, file rasp
- PF 1152 200 H1, half-round file
- PF 1212 VZ 200 H1/2, hobby file



Length [mm]	Length [inch]	EAN 4007220		Description
200	8	008515	1	PF-Set 300 200



### Special files





#### **Hobby file (1212)**

Rectangular file with different cuts on three sides. Version with tang and ergonomic file handle. Cross cut 1 on front side for roughing, single cut 2 on back side and edge for sharpening.

#### Advantages:

- For roughing and sharpening using the same tool.
- Suitable for versatile use.

#### Materials that can be worked:

steel, cast steel

#### **Applications:**

deburring, surface work, work on edges, sharpening, fine finishing

#### PFERDVALUE:



Profile	- J	Length	Cut	Cross	Incl.	$\Longrightarrow$	Description	
	[mm]	[inch]	Cross cut 1/single cut 2	section [mm]	handle			
			EAN 4007220					
POS packag	ing (with ha	ndle)						
1212	200	8	542293	25.0 x 4.5	FH 4/1	5	PF 1212 VZ 200 H1/2	





#### File rasp (1512)

Rectangular file with different cuts on both flat sides. Version with tang and ergonomic file handle. Cross cut 1 on front side for roughing, rasp cut 1 on back side for rasping and one cut edge.

#### Advantages:

- For roughing and sharpening using the same tool.
- Suitable for versatile use.

#### Materials that can be worked:

soft non-ferrous metal, wood, plastics, steel

#### **Applications:**

deburring, cutting out holes, surface work, work on edges



Profile	Length [mm]	Length [inch]	Cut Cross cut 1/rasp cut 1	Cross section [mm]	Incl. handle		Description
			EAN 4007220				
POS packagi	ng (with han	dle)					
1512	200	8	542149	20.0 x 5.0	FH 4/1	5	PF 1512 VZ 200 H1/1



### Files for the workshop Special files

#### **Universal sharpening file (1212)**

Rectangular file, tanged and single cut 2 on two sides, with rounded, uncut narrow edges and ergonomic file handle. Often referred to as a lawnmower file. Suitable for sharpening cutting tools.

#### Advantages:

- Long tool life.
- High surface quality with optimum cutting performance.

#### Materials that can be worked:

steel, cast steel

#### **Applications:**

deburring, sharpening

#### PFERDVALUE:



Profile	Length [mm]	Length [inch]	Cut Single cut 2 EAN 4007220	Cross section [mm]	Incl. handle		Description
POS packaging	(with handle)						
1212	200	8	542286	25.0 x 4.5	FH 4/1	5	PF 1212 ruk 200 H2

#### Fitter's file (611)

Rectangular file with different milled cuts, tanged and with ergonomic file handle. Straight cut with chip breaker on front side, radial cut on back side, uncut edges. Suitable for various materials and for synthetic resin fillers or wood containing nails as well as steels up to 1,200 N/mm<sup>2</sup> and cast steel or for work on soldered seams.

#### Advantages:

- Extremely robust design.
- Suitable for versatile use.

#### Materials that can be worked:

aluminium, soft non-ferrous metal, wood, plastics, steel, cast steel

#### Applications:

deburring, work on edges, surface work, roughing



Profile	Length [mm]	Length [inch]	Cut Radial 1/straight 2 EAN 4007220	Cross section [mm]	Incl. handle		Description
POS packagin	g (with handle)						
611	250	10	542309	24.0 x 5.3	FH 4/1	5	PF 611 250 Z1/2



Special files







# Files for aluminium, hand (1612 w)

Rectangular file, tanged and special cut on three sides, one edge uncut. Shape A according to DIN 7261. Particularly suitable for work on soft metals.

#### Advantages:

- Special tooth geometry prevents the file from clogging.
- Good surface.
- Labour-saving work.

#### Materials that can be worked:

aluminium, soft non-ferrous metal, plastics

#### **Applications:**

deburring, surface work

Profile	Length	Length		Cross	Matching		Description
	[mm]	mm] [inch] 0 section [mm]  EAN 4007220	handle				
			EAN 4007220				
1612 w	250	10	005798	25.0 x 6.0	FH 4/1	10	1612 w 250 H0
	300	12	005804	30.0 x 6.5	FH 5/1	5	1612 w 300 H0





# Files for aluminium, half-round (1652 w)

Half-round file, tanged with cut on two sides. Shape E according to DIN 7261. Outstanding filing performance thanks to the PFERD spiral cut on the half-round side. Particularly suitable for work on soft metals.

#### Advantages:

- Special tooth geometry prevents the file from clogging.
- Good surface.
- Labour-saving work.


#### Materials that can be worked:

aluminium, soft non-ferrous metal, plastics

#### Applications:

deburring, surface work

Profile	Length [mm]	Length [inch]	Cut 0	Cross section	Matching handle		Description
				[mm]			
			EAN 4007220				
1652 w	250	10	006375	25.0 x 7.0	FH 4/1	10	1652 w 250 H0
	300	12	006399	30.0 x 8.5	FH 5/1	5	1652 w 300 H0

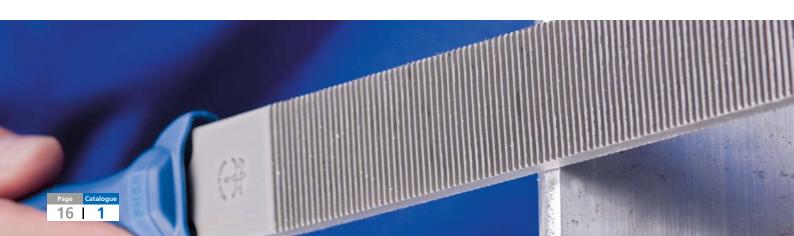



# Files for the workshop Special files

#### **Files for plastics**

Rectangular file, tanged and cross cut on three sides, one edge uncut. The cross cut is characterised by a particularly high stock removal rate. Also well suited to work on plastics, particularly duroplastics.

#### Advantages:

- Particularly high stock removal rate.
- Suitable for versatile use.

#### Materials that can be worked:

soft non-ferrous metal, plastics

#### **Applications:**

deburring, work on edges

Profile	Length [mm]	Length [inch]		Cross section [mm]	Matching handle		Description
1312	150	6	006887	16.0 x 2.8	FH 3	10	1312 150
	200	8	006894	20.0 x 3.5	FH 4/1	10	1312 200

#### **Lathe files**

Rectangular file, tanged and cut on two sides, two edges uncut. Shape H according to DIN 7261. Suitable for deburring parts turned on a lathe.

#### Advantages:

Opposed direction of the cut on the front and back side causes the file to move away from the chuck during lathe work. This improves safety.

#### Materials that can be worked:


aluminium, hard non-ferrous metal, plastics, steel, cast steel

#### **Applications:**

deburring, work on edges

Prof	le Length [mm]			Cross section [mm]	Matching handle		Description
1612	DE 250	10	011713	25.0 x 6.0	FH 4/1	10	1612 DE 250 H1
	300	12	011720	30.0 x 6.5	FH 5/1	5	1612 DE 300 H1



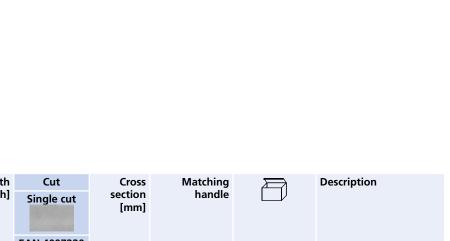

### Key files



These small files are perfectly suited to light and delicate filing tasks, especially in tool and mould-making. PFERD produces the different file shapes according to DIN 7283 specifications.

#### **Advantages:**

- Versatile application.
- Very handy design for the processing of delicate components.

#### Materials that can be worked:

- Aluminium
- Copper
- Brass
- Zinc
- Grey cast iron
- Steels up to 1,200 N/mm²
- Cast steel

#### **Applications:**

- Deburring
- Surface work
- Work on edges (chamfering, rounding)
- Sharpening
- Finishing

#### **Ordering note:**

PFERD key files are available in industrial packaging without handle or in POS packaging with wooden handle.




#### **Accessories:**

PFERD offers a practical quickmounting handle for key files.



File tangs are reliably clamped by simply twisting the two halves of the handle. For ordering data and more information about PFERD file handles, see page 57.



#### Hand (1117)

Rectangular files that are cut on three sides and uncut on one side. Version with tang.

Profile	Length [mm]	Length [inch]		Cross section [mm]	Matching handle	Incl. handle		Description
Industrial page	kaging (with	out handle)						
1117	100	4	010624	10.0 x 1.4	FH 2	-	10	1117 100 H2
	150	6	010648	16.0 x 1.8	FH 2	-	10	1117 150 H2
POS packagin	ng (with handl	e)						
1117	100	4	009154	10.0 x 1.4	-	wooden	10	PF 1117 100 H2





Rectangular file, tapered and cut on four sides. Version with tang.

Profile	Length [mm]	Length [inch]		Cross section [mm]	Matching handle		Description
1127	100	4	010532	10.0 x 1.4	FH 2	10	1127 100 H2
	150	6	010563	16.0 x 1.8	FH 2	10	1127 150 H2





# Files for the workshop Key files

#### Three square (1137)

Triangular file, tapered and cut on three sides. Version with tang.



Profile	Length [mm]	Length [inch]	2	Cross section [mm]	Matching handle		Description
			EAN 4007220				
1137	100	4	010693	5.0	FH 2	10	1137 100 H2

#### **Square (1147)**

Square file, tapered and cut on four sides. Version with tang.





Profile	Length [mm]	Length [inch]	Cut 2 EAN 4007220	Cross section [mm]	Matching handle	Incl. handle		Description	
Industrial pa	ckaging (witho	out handle)							
1147	100	4	010716	3.0	FH 2	-	10	1147 100 H2	
POS packagii	ng (with handl	e)							
1147	100	4	009185	3.0	-	wooden	10	PF 1147 100 H2	

#### **Half-round (1157)**

Half-round file, cut on two sides. Version with





Profile	Length [mm]	Length [inch]		Cross section [mm]	Matching handle	Incl. handle		Description
Industrial pad	kaging (with	out handle)						
1157	100	4	010655	9.0 x 3.0	FH 2	-	10	1157 100 H2
POS packagin	ng (with handl	e)						
1157	100	4	009192	9.0 x 3.0	-	wooden	10	PF 1157 100 H2

#### **Round (1167)**

Round file with circumferential cut. Version with tang.





Profile	Length [mm]	Length [inch]		Cross section [mm]	Matching handle	Incl. handle		Description	
Industrial pac	kaging (witho	out handle)							
1167	100	4	010679	3.0	FH 2	-	10	1167 100 H2	
POS packagin	g (with handl	e)							
1167	100	4	009208	3.0	-	wooden	10	PF 1167 100 H2	

### Key file sets





#### Key file set 265 A

Contains an application-oriented selection of key files. Ideal for fine and delicate filing.

■ half-round (1157)

quick-mounting

round (1167)

handle

#### Contents:

#### Six key files:

- hand (1117)
- flat (1127)
- three square (1137)
- square (1147)

#### Advantages:

■ Suitable for a wide range of delicate and light filing tasks.

#### Ordering notes:

■ Supplied with quick-mounting handle no. 210 in a plastic pouch to protect against dirt and damage.

Length	Length	Cut	hightharpoonup	Description
[mm]	[inch]	2		
		EAN 4007220		
		LAN 4007220		
100	4	011386	1	265 A 100 H2



#### Key file set 265 B

Contains an application-oriented selection of key files. Ideal for fine and delicate filing.

■ half-round (1157)

■ round (1167)

#### Contents:

Six key files:

- hand (1117)
- flat (1127) ■ three square
- (1137)
- square (1147)

#### Advantages:

■ Suitable for a wide range of delicate and light filing tasks.

#### Ordering notes:

■ Supplied with mounted wooden handles in a plastic pouch to protect against dirt and

Length	Length	Cut	hightharpoonup	Description	
[mm]	[inch]	2			
		EAN 4007220			
100	4	011393	1	265 B 100 H2	



#### Key file set 265 K

Contains an application-oriented selection of key files. Ideal for fine and delicate filing.

#### Contents:

Six key files:

- hand (1117)
- flat (1127)
- three square (1137)■ square (1147)
- round (1167)
- half-round (1157)

#### Advantages:

■ Suitable for a wide range of delicate and light filing tasks.

#### Ordering notes:

■ Supplied with mounted wooden handles in a metal box to protect against dirt and damage.

Length [mm]	Length [inch]	Cut 2		Description
		EAN 4007220		
100	4	011362	1	265 K 100 H2





Tungsten point file

#### **Tungsten point file**

Rectangular file with flat handle and cut 2 on two sides. Shape A according to DIN 7283. Very thin file, which is particularly suitable for work on contacts and in narrow grooves and slots.

#### Advantages:

- The punched file handle eliminates the need for an additional handle.
- Very small cross section for use in keyways.
- Handy design.

#### Materials that can be worked:

soft non-ferrous metal, steel, cast steel

#### Applications:

deburring, surface work

Profile	Length	Length	Cut	Cross	abla	Description
	[mm]	[inch]	2	section [mm]		
			EAN 4007220			
1118 A	100	4	010747	8.0 x 1.2	10	1118 A 100 H2






# Car body files

### General information



**Cross section of a file tooth** Enlarged tenfold



Cross section of a car body file Illustration of convex shape



#### PFERD car body files are not just needed for automotive body work

They are ideal for **any surface work** on sheet metal, non-ferrous metals and plastics requiring a particularly smooth and scratch-free finish. The surfaces can be painted immediately after filing. No subsequent polishing is necessary, as there are no scratches. The positive rake angle, the convex shape and the unsurpassed sharpness of the teeth provide outstanding filing performance and an optimum surface quality for professional users of PFERD milled car body files.

#### Ideal tooth shape

The teeth of the car body files are milled from solid material, as distinct from the usual cutting process. Each individual tooth is designed to ensure that the chip rolls up before the rounded tooth face and is found in the large flute. A special finishing treatment produces razor-sharp tooth edges that give these files an outstanding stock removal rate. The car body files are available in five tooth versions and in cross-cut form.

#### Convex shape prevents scratches

The convex shape means that the cutting area is not flat, but higher in the middle than around the file edges. The height difference is about 0.4 mm. This special cross-section shape prevents the edges of the file from coming into contact with the workpiece during processing, thus preventing scratches.

#### Materials that can be worked:

- Aluminium
- Steels up to 1,200 N/mm<sup>2</sup>

#### **Applications:**

- Levelling
- Surface work

### Adjustable holders for car body files



#### Adjustable holders for car body files

This ergonomic and particularly lightweight holder permits individual tensioning of car body file blades to match the surface contour of the workpiece.

#### Advantages:

- The bending radius of the file can be steplessly adjusted via the tensioning system.
- Particularly lightweight plastic design without plasticizer.
- Can be used in a focused manner or over a wide area as the car body file can be used curved as well as straight.

Enables work with low levels of fatigue thanks to vibration-damping rubber pad.







Suitable for file length [mm]	Suitable for file length [inch]			Description
350	14	097915	1	KFH 350



#### Adjustable holders for car body files

This ergonomic holder permits individual tensioning of car body file blades to match the surface contour of the workpiece.

#### Advantages:

- The bending radius of the file can be steplessly adjusted via the tensioning system.
- Can be used in a focused manner.
- The die-cast aluminium structure is light-weight and stable.

Suitable for file length [mm]	Suitable for file length [inch]			Description
300	12	016374	1	BH 125/300
350	14	016381	1	BH 125/350




# Car body files Car body file blades

#### Car body file blades

Car body file blades can be tensioned individually in the car body file holder and can be adapted to match the surface contour of the workpiece.

#### Advantages:

- The bending radius of the file can be steplessly adjusted via the tensioning system.
- Convex shape of the file prevents unwanted
- Can be used in a focused manner.
- Razor-sharp tooth edges.



Profile	Length [mm]	Length [inch]	Cut	Туре	EAN 4007220	Cross section [mm]	Teeth per inch		Description
299 b	300	12	1	coarse	016183	31.0 x 4.7	9	1	299 b 300 Z1
	300	12	2	medium	016190	31.0 x 4.7	10	1	299 b 300 Z2
	300	12	3	fine	016206	31.0 x 4.7	12	1	299 b 300 Z3
	350	14	00	extra-coarse	016268	36.0 x 5.8	7	1	299 b 350 Z00
	350	14	0	very coarse	016220	36.0 x 5.2	8	1	299 b 350 Z0
	350	14	1	coarse	016237	36.0 x 4.7	9	1	299 b 350 Z1
	350	14	2	medium	016244	36.0 x 4.7	10	1	299 b 350 Z2
	350	14	3	fine	016251	36.0 x 4.7	12	1	299 b 350 Z3
299 e	350	14	Special cross cut (SK)	-	016312	36.0 x 4.7	-	1	299 e 350

### Car body files, tanged type

299 c 350 H3

#### Car body files, tanged type

File curved in longitudinal and transverse direction (convex), tanged. Cut on one side.

#### Advantages:

- Convex shape of the file prevents unwanted scratches.
- Can be used in a focused manner.

### **Applications:**

deburring, work on edges (chamfering,

roui	naing)								
	Profile	Length [mm]	Length [inch]	Cut	EAN 4007220	Cross section [mm]	Matching handle		Description
	299 с	350	14	1	016282	34.5 x 7.6	FH 5/1	5	299 c 350 H1

016299

34.5 x 7.6

FH 5/1



## Milled tooth files

### Paint peeler





#### **Paint peeler**

The small design of the paint peeler enables work in hard-to-reach areas. It is used for finishing the smallest painted surfaces with the corresponding plastic holder. This plastic holder allows for very fine adjustment of the file using two adjusting screws. Suitable for smoothing, correcting painting faults such as impurities, dust particles and air bubbles as well as removing extremely thin paint layers.

#### Advantages:

- Convex shape of the file prevents unwanted scratches.
- Precision-cut, razor-sharp teeth provide a very high-quality, scratch-free surface finish.
- Surfaces can be painted or processed immediately.
- File blade can be used on both sides.

#### Industry:

car, car body and trailer construction, furniture manufacture

#### Materials that can be worked:

aluminium, steels up to 1,200 N/mm<sup>2</sup>

#### Ordering notes:

- The paint peeler is supplied together with a file.
- Replacement file for paint peelers: LAHF 50 Z3

Length	Length	Cut	Cross section	Replacement file		Description
[mm]	[inch]	3	[mm]			
		EAN 4007220				
Paint peeler						
50	2	016428	36.0 x 4.7	LAHF 50 Z3	1	LAH Z3
Replacement file for	or paint peelers					
50	2	016329	36.0 x 4.7	-	10	LAHF 50 Z3

#### Universal chamfer file



#### Universal chamfer file

Rectangular file in a special plastic holder, straight cut on two sides. Ideal for easy and fast repair and for deburring on the guide rails of chain saws. Regular maintenance extends the service life of the guide rail and saw chain. Increases cutting precision and safety.

#### Advantages:

- The special holder enables easy tool control and exact, right-angled positioning of the chamfer file on the guide rail.
- Also excellent for sharpening ski edges.

**Materials that can be worked:** aluminium, grey cast iron, steels up to 1,200 N/mm<sup>2</sup>

#### Applications:

work on edges, chamfering, deburring

#### Ordering notes:

- The universal chamfer file is supplied together with a file blade.
- Replacement file blade for universal chamfer file: KF 110 Z2

Length [mm]	Length [inch]	Cut 2	Cross section [mm]	Replacement file		Description
Universal chamfer file	4-1/2	<b>EAN 4007220</b> 016008	-	KF 110 Z2	1	UKF Z2
Replacement file blad	<b>e</b> 4-1/2	015995	31.0 x 4.7	-	10	KF 110 Z2





### Milled tooth files

Milled tooth files, tanged type

Milled tooth files from PFERD are particularly well suited to coarse stock removal. The highly abrasive milled tooth geometry with large flutes prevents clogging.

#### **Advantages:**

- Very aggressive.
- No clogging thanks to the large flutes.

#### **Recommendations for use:**

- Choose cut 1 with 8 teeth per inch for coarse stock removal.
- Choose cut 2 with 11 teeth per inch for medium stock removal.
- Choose cut 3 with 17 teeth per inch for fine stock removal.

#### Materials that can be worked:

- Aluminium
- Grey cast iron
- Steels up to 1,200 N/mm²
- Cast steel
- Copper
- Brass

#### **Applications:**

- Levelling
- Deburring
- Surface work
- Work on edges (chamfering, rounding)



#### Hand

Rectangular file with cuts on three sides. Version with tang. Straight cut with chip breaker on the flat sides, straight cut on the high edge. Suitable for filing rectangular geometries.

#### Ordering notes:

■ Please specify the desired cut.

Profile	Length [mm]	Length [inch]	Cut		Cross section	Matching handle		Description	
	ţ <u>j</u>	[men]	1	2	3	[mm]	nanare		
				EAN 4007220	)				
290	250	10	015636	015643	-	25.0 x 5.5	FH 4/1	10	290 250 Z
	300	12	015650	015667	015674	30.0 x 6.0	FH 5/1	5	290 300 Z
	350	14	015681	015698	_	36.0 x 7.0	FH 5/1	5	290 350 Z

#### Half-round, hollow

Half-round file, hollow and tapered. Version with tang. With chip breaker on the half-round side, straight cut on one side. Suitable for work on radii and for filing of half-round shapes.






Pro	file Length	-		Cross	Matching		Description	
	[mm]	[inch]	1	section [mm]	handle			
			EAN 4007220					
	295 250	10	015711	23.0 x 7.0	FH 4/1	10	295 250 Z1	
	300	12	015735	27.0 x 9.0	FH 5/1	5	295 300 Z1	



## Milled tooth files

### Milled tooth file blades







#### Hand

Rectangular file with two bores for mounting on the file holder, straight cut with chip breaker on the flat sides.

#### Materials that can be worked:

aluminium, grey cast iron, cast steel, steels up to 1,200  $\mbox{N/mm}^2$ 

#### Ordering notes:

■ Please specify the desired cut.

Profile	Length	Length	Cut		Cross	Matching	$\Longrightarrow$	Description	
	[mm]	[inch]	1	2	section	holder			
					[mm]				
			EAN 4	007220					
296	300	12	015834	015841	31.0 x 4.7	296a/300	5	296 300 Z	
	350	350 14	015858	015865	36.0 x 4.7	296a/350	5	296 350 Z	

### Holder for file blades



#### **Holder for file blades**

This reusable, ergonomic file holder gives optimum file control and optimum filing results. Can be used for car body file blades, comes in two sizes for all PFERD milled file blades.

#### Advantages:

- Quick tool changes without special tools.
- Handy design.

Suitable for	EAN 4007220	Matching handle		Description
296 300 mm	015896	FH 5/1	1	296a/300
296 350 mm	015902	FH 5/1	1	296a/350





## **Tungsten carbide files**

Tungsten carbide files

#### Tungsten carbide files, flat type

Flat tungsten carbide files for work on flat, convex and concave surfaces.

#### Advantages:

■ The best results thanks to radial and convex cut pattern.

#### Materials that can be worked:

steel, steel materials with a hardness > 54 HRC

#### **Recommendations for use:**

- Use tungsten carbide files without chip breakers to achieve a very high surface quality.
- Use tungsten carbide files with chip breakers to achieve a high stock removal rate.

■ Tungsten carbide files can be resharpened.

#### Ordering notes:

- HMF 5010/1, HMF 13220/1: Rectangular files, convex in transverse and longitudinal direction, cut on one side.
- HMF 5010/2, HMF 13220/2: Rectangular file, convex in transverse direction, cut on two sides, one of which has chip breakers.
- Holders for tungsten carbide files (HMFH) must be ordered separately.

HMF 5010/1 HMF 13220/1



HMF 5010/2 HMF 13220/2



Length [mm]	Length [inch]	EAN 4007220	Teeth per cm	Cross section [mm]	Chip breaker	Matching holder		Description
50	2	016435	10	10 x 5.0	without	HMFH 50	1	HMF 5010/1
		016442	6.5	10 x 5.0	1 side without, 1 side with	HMFH 50	1	HMF 5010/2
132	5 1/4	016473	6.5	20 x 7.0	without	HMFH 132	1	HMF 13220/1
		016480	5	20 x 7.0	1 side without, 1 side with	HMFH 132	1	HMF 13220/2

#### Tungsten carbide files, round type

Round tungsten carbide files for work on concave shapes and for refining inner radii, e.g. drip edges. Round tungsten carbide files with circumferential cut. The mounting system in the HMFH 51 R file holder allows the files to be rotated around their own axis in 60° steps.

#### Advantages:

- The unique tooth geometry ensures optimum results.
- Can be used 360°.

#### Materials that can be worked:


steel, steel materials with a hardness > 54 HRC

#### Ordering notes:

■ Please order holders for tungsten carbide files (HMFH 51 R) separately.

HMF 1050	general management and a
----------	--------------------------





### Holder for tungsten carbide files

#### Holder for tungsten carbide files

Reusable and ergonomically shaped file holder with ergonomic file handle.

#### Advantages:

- Optimal file control is guaranteed.
- The best results.
- Rapid tool change.

#### Ordering notes:

Please order tungsten carbide files separately.





Matching tungsten carbide files	EAN 4007220		Description
HMF 5010/1, HMF 5010/2	016398	1	HMFH 50
HMF 13220/1, HMF 13220/2	016411	1	HMFH 132
HMF 1050, HMF 1250	016404	1	HMFH 51 R

### Three square saw files



Triangular files, tapered to the tip with tang. Cut on three sides and three edges.

#### **Advantages:**

- Good stock removal rate.
- Long service life.
- Versatile application.

#### Materials that can be worked:

- Steels up to 1,200 N/mm²
- Cast steel

#### **Applications:**

■ Sharpening

#### **Ordering notes:**

- Type POS is supplied with ergonomic file handle.
- Available in the versions regular, slim, extra slim, and ultra-slim according to DIN 7262.



#### **PFERD**VALUE:

**PFERD**ERGONOMICS recommends the ergonomic file handle for comfortable work.





#### Saw files, normal (1232)

PFERDVALUE:



Profile	Length [mm]	Length [inch]		Cross section [mm]	Matching handle	Incl. handle		Description			
Industrial page	Industrial packaging (without handle)										
1232	125	5	010310	10.0	FH 3	-	10	1232 125 H2			
	150	6	010327	12.0	FH 3	-	10	1232 150 H2			
	250	10	010358	18.0	FH 4	-	10	1232 250 H2			
POS packagin	ng (with handl	e)									
1232	125	5	542347	10.0	-	FH 3	5	PF 1232 125 H2			
	150	6	542354	12.0	-	FH 3	5	PF 1232 150 H2			





#### Saw files, slim (1237)



Profile	Length	Length	Cut	Cross	Matching	Incl.	$\blacksquare$	Description	
	[mm]	[inch]	2	section [mm]	handle	handle			
			EAN 4007220						
Industrial page	kaging (with	out handle)							
1237	100	4	010365	6.0	FH 2	-	10	1237 100 H2	
	125	5	010389	7.0	FH 2	-	10	1237 125 H2	
	150	6	010396	8.5	FH 3	-	10	1237 150 H2	
	175	7	010402	10.0	FH 4	-	10	1237 175 H2	
	200	8	010419	12.0	FH 4	-	10	1237 200 H2	
POS packagin	ng (with handl	e)							
1237	125	5	542361	7.0	-	FH 2	5	PF 1237 125 H2	
	150	6	542378	8.5	-	FH 3	5	PF 1237 150 H2	



# **Sharpening files**Three square saw files

#### Saw files, extra slim (1238)

#### PFERDVALUE:






Profile	Length [mm]	Length [inch]	Cut 2 EAN 4007220	Cross section [mm]	Matching handle	Incl. handle		Description	
Industrial page	kaging (witho	ut handle)							
1238	100	4	010426	5.0	FH 2	-	10	1238 100 H2	
	150	6	010457	7.0	FH 2	-	10	1238 150 H2	
POS packagir	ng (with handle	e)							
1238	150	6	542408	7.0	-	FH 2	5	PF 1238 150 H2	

#### Saw files, ultra-slim tapers (1239)



Profile	Length [mm]	Length [inch]	Cut 2 EAN 4007220	Cross section [mm]	Matching handle		Description
1239	125	5	328286	4.7	FH 2	10	1239 125 H2
	200	8	328316	8.0	FH 3	10	1239 200 H2

#### Fine saw file








#### PFERDVALUE:



Profile	Length [mm]	Length [inch]	Cut	Cross section	Matching handle	lncl. handle		Description	
	, , , , ,		2	[mm]	Harraic	nanaic			
			EAN 4007220						
Industrial page	ckaging (witho	out handle)							
340	110	4 1/2	011157	6.5 x 4.8	FH 2	-	10	340 110 H2	
POS packagir	ng (with handl	e)							
340	110	4 1/2	542415	6.5 x 4.8	-	FH 2	5	PF 340 110 H2	
			·						

#### Cantsaw file (1230)





Profile	Length [mm]	Length [inch]	Cut 2 EAN 4007220	Cross section [mm]	Matching handle		Description
1230	200	8	011171	19.5 x 11.0	FH 4	10	1230 200 H2

Three square saw files







#### Band saw files (1231)

Triangular file, tapered with tang. Cut on three sides, round cut edges. Shape D according to DIN 7262. Suitable for sharpening saw blades.

Profile	Length	Length		Cross	Matching		Description
	[mm]	[inch]	2	section [mm]	handle		
			EAN 4007220				
1231	150	6	011096	14.6	FH 3	10	1231 150 H2
	175	7	011102	15.5	FH 4	10	1231 175 H2
	200	8	011119	17.0	FH 4	10	1231 200 H2

### Knife sharpening files





#### **Knife sharpening files (1272)**

Triangular file with knife profile, tanged. Cut on two sides and the narrow edge. Shape G according to DIN 7262.

#### Ordering notes:

■ Type POS is supplied with an ergonomic file handle.

#### PFERDVALUE:



Profile	Length	Length	Cut	Cross section	Matching	Incl.		Description
	[mm]	[inch]	2	[mm]	handle	handle		
			EAN 4007220					
Industrial pa	ckaging (wit	hout handle)						
1272	200	8	010853	20.0 x 6.4 x 1.5	FH 4/1	-	10	1272 200 H2
	250	10	010860	25.0 x 7.9 x 1.75	FH 4/1	-	10	1272 250 H2
POS packagi	ng (with han	dle)						
1272	200	8	542385	20.0 x 6.4 x 1.5	-	FH 4/1	5	PF 1272 200 H2

### Featheredge file





#### Featheredge file

File with rhomboid cross section with feather edge profile, tanged. Cut on four sides.

Profile	Length [mm]	Length [inch]		Cross section [mm]	Matching handle		Description
305	200	8	010884	32.0 x 6.0	FH 5/1	10	305 200 H2



# Sharpening files Mill saw files

#### Mill saw files (1212)

Rectangular file, tanged. Available in three versions: With two straight edges (1212), with one round and one straight edge (1212 gr), with two round edges (1212 r) and cut on four sides. Shape E according to DIN 7276.

#### Ordering notes:

■ Type POS is supplied with an ergonomic file handle.


#### PFERDVALUE:





Profile	Length	Length	Cut	Cross	Matching	Incl.	$\Longrightarrow$	Description			
	[mm]	[inch]	section handle [mm]		handle						
Industrial packaging (without handle)											
1212	200	8	010914	20.0 x 3.5	FH 4/1	-	10	1212 200 H2			
	250	10	010921	25.0 x 4.5	FH 4/1	-	10	1212 250 H2			
	300	12	010938	30.0 x 5.0	FH 5/1	-	10	1212 300 H2			
Industrial page	ckaging (witho	ut handle) – g	jr .								
1212 gr	150	6	010945	16.0 x 3.0	FH 3	-	10	1212 gr 150 H2			
	200	8	010952	20.0 x 3.5	FH 4/1	-	10	1212 gr 200 H2			
	250	10	010976	25.0 x 4.5	FH 4/1	-	10	1212 gr 250 H2			
	300	12	010983	30.0 x 5.0	FH 5/1	-	10	1212 gr 300 H2			
POS packagir	ng (with handle	e) – gr									
1212 gr	200	8	542248	20.0 x 3.5	-	FH 4/1	5	PF 1212 gr 200 H2			
Industrial page	ckaging (witho	ut handle) – r									
1212 r	200	8	011003	20.0 x 3.5	FH 4/1	-	10	1212 r 200 H2			
	250	10	011027	25.0 x 4.5	FH 4/1	-	10	1212 r 250 H2			
	300	12	011034	30.0 x 5.0	FH 5/1	-	10	1212 r 300 H2			
POS packagir	ng (with handle	e) – r									
1212 r	200	8	542255	20.0 x 3.5	-	FH 4/1	5	PF 1212 r 200 H2			
	250	10	542279	25.0 x 4.5	-	FH 4/1	5	PF 1212 r 250 H2			

# Mill saw files, US type 1212 SP ("Mill file")




#### **Applications:**

sharpening, deburring, surface work

#### Ordering notes:

■ Please specify the desired cut.

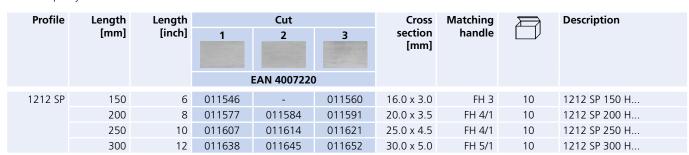

(并

### Chain saw files





#### Chain saw files, round

Round file for manual sharpening of saw chains with precise spiral cut for outstanding sharpness and particularly long tool life. For fast, score-free sharpening of saw teeth. In comparison to machine sharpening, these files remove stock sparingly without thermal loads due to friction on the metal.

#### Advantages:

- Classic Line: Optimum combination of tool life and stock removal rate, aggressive filing for quick sharpening.
- **Premium Line:** Perfect sharpness thanks to innovative spiral cut, for ensuring a fine tooth surface for maximum cutting performance and a gentler feel to the tool whilst filing.

#### **Applications:**

sharpening

#### Ordering notes:

- Please specify the desired Performance Line.
- Available in different diameters, suitable for all common saw chains.
- Packaging units of 6 and 60 pieces in a practical cardboard box.

#### Materials that can be worked:

steels up to 1,200 N/mm<sup>2</sup>

Profile	ofile Length Leng		Dia.	Dia.	Performa	ance Line	Chain pitch	Matching handle	$\Rightarrow$	Description			
	[mm]	[inch]	[mm]	[inch]	Classic Line	Premium Line	[inch]						
					EAN 4	007220							
412	200	8	3.5	9/64	005194	-	1/4 LP*	SH 220	6	412 200 x 3,5			
			4.0	5/32	005217	021897	1/4 , 3/8 LP*	FH 2	6	412 200 x 4,0			
						4.5	11/64	005224	021910	.325	FH 2	6	412 200 x 4,5
				4.8	3/16	005231	021927	.325	HKSF 100, FH 2, FH 3	6	412 200 x 4,8		
					5.16	13/64	005248	021934	3/8	HKSF 100, FH 3	6	412 200 x 5,16	
					5.5	7/32	005255	021941	3/8 , 404	HKSF 100, FH 3	6	412 200 x 5,5	
			6.3	1/4	005262	-	-	HKSF 100, FH 3	6	412 200 x 6,3			
			7.0	9/32	005279	-	-	HKSF 100, FH 3	6	412 200 x 7,0			
		7.9	5/16	005286	-	3/4	HKSF 100, FH 3	6	412 200 x 7,9				

Always observe the current guidelines and recommendations of the equipment and saw chain manufacturers. \* LP = Low Profile

### Packing system for PFERD chain saw files

#### Pack of 6 6 chain saw files



#### **Display box** 60 chain saw files = 10 packs of 6





You can find matching ergonomic file handles for PFERD chain saw files on page 56.



# Sharpening files Chain saw files

#### Chain saw files in plastic pouch 3 pc. packaging

Three round files with spiral cut in promotional plastic packaging to protect against dirt and damage.

#### Advantages:

- The opening on the front of the packaging makes it easier to remove and return the files
- Classic Line: Optimum combination of tool life and stock removal rate, aggressive filing for quick sharpening.
- **Premium Line:** Perfect sharpness thanks to innovative spiral cut, for ensuring a fine

tooth surface for maximum cutting performance and a gentler feel to the tool whilst filing.

#### Ordering notes:

- Please specify the desired Performance Line.
- Chain saw files 412, file diameter 3.2 mm, are supplied with a round cylindrical tang.
- One packaging unit contains four plastic packs, each containing three files.



Profile	Length	Length	_			Dia.	Performa	ance Line	Chain pitch	Matching handle	$\blacksquare$	Description						
	[mm]	[inch]	[mm]	[inch]	Classic Line	Premium Line	[inch]											
POS paci	kaqing				LAN T	007220												
412	200	200 8	3.2	1/8	959534	-	1/4 LP*	SH 220	12	412 4x3 200 3,2								
				4.0	5/32	958803	056899	1/4 , 3/8 LP*	FH 2	12	412 4x3 200 4,0							
												4.5	11/64	072868	072875	.325	FH 2	12
			4.8	3/16	958810	057339	.325	HKSF 100, FH 2, FH 3	12	412 4x3 200 4,8								
			5.16	13/64	056875	063965	3/8	HKSF 100, FH 3	12	412 4x3 200 5,16								
			5.5	7/32	958827	064214	3/8 , 404	HKSF 100, FH 3	12	412 4x3 200 5,5								

Always observe the current guidelines and recommendations of the equipment and saw chain manufacturers. \* LP = Low Profile

#### Chain saw files in plastic pouch 2 pc. packaging

Two round Classic Line files with spiral cut in promotional plastic packaging to protect against dirt and damage.

## 图 | 阿里里

#### **Advantages:**

The overlapping opening on the rear ensures that no files can inadvertently slide out of the packaging. ■ Classic Line: Optimum combination of tool life and stock removal rate, aggressive filing for quick sharpening.

#### Ordering notes:

One packaging unit contains twenty plastic packs, each containing two files.

Profile	Length [mm]	Length [inch]	Dia. [mm]	Dia. [inch]	Performance Line	Chain pitch Matching handle [inch]		Chain pitch Matching handle [inch]							Description
					Classic Line										
					EAN 4007220										
POS pac	kaging														
412	200	8	4.0	5/32	005408	1/4 , 3/8 LP*	FH 2	40	4122 SK-4,0 200 Classic						
			4.8	3/16	005415	.325	HKSF 100, FH 2, FH 3	40	4122 SK-4,8 200 Classic						
			5.16	13/64	045718	3/8	HKSF 100, FH 3	40	4122 SK-5,16 200 Classic						
			5.5	7/32	005422	3/8 , 404	HKSF 100, FH 3	40	4122 SK-5,5 200 Classic						

Always observe the current guidelines and recommendations of the equipment and saw chain manufacturers. \* LP = Low Profile



### Chain saw files





#### Wooden handles for chain saw files

The wooden handle for chain saw files has an angular contact surface which maintains a 35° filing angle for accurate, even sharpening of all chainsaw teeth.

#### Advantages:

Optimized filing angle ensures precise, even filing.

Suitable for chain saw file diameter [mm]	4007220	Overall length [mm]		Description	
4.8 / 5.16 / 5.5 / 6.3 / 7.0 / 7.9		100	10	HKSF 100/10	
	015391	100	100	HKSF 100/100	



#### Ergonomic file handle, chain saw gauge

The chain saw gauge supports consistent sharpening results by providing the correct sharpening angle. It is attached to the stud of the ergonomic file handle FH 1 KSF.

#### Ordering notes:

- Please order ergonomic file handle FH 1 KSF separately.
- The chain saw gauge is available in two versions: an angle of 25°/30° and an angle of 30°/35°.

P	FΕ	RI	D١	/Δ	П	IF.
г	ГС	N	U١	$^{\prime}$	Lι	JE.



Suitable for chain saw file diameter [mm]	EAN 4007220	Overall length [mm]		Description
4.0 / 4.5 / 4.8 / 5.16 / 5.5	535707	120	10	FH 1 KSF
	551899	-	10	KSSL 25/30
	536308	-	10	KSSL 30/35



You can find information on the maintenance and care of a saw chain and on the repair of other forestry tools in the "PFERD tools for forestry" PRAXIS FOCUS brochure.



In our pocket guide "Sharpening saw chains", we have concisely summarised all the important information that you need for sharpening your saw chains.



### Chain saw sharpeners CHAIN SHARP

Chain saw sharpeners from PFERD are exceptionally well suited to the manual sharpening of saw chains. Manual sharpening is more economic and much more gentle than machine-based sharpening, and can prolong the operating life of the saw chain.

#### **Advantages:**

- Flexible use on-site due to compact device
- Easy to use and defined sharpening angle.
- Long operating life due to interchangeable files.
- Precise and uniform sharpening result, even for inexperienced users.

#### Materials that can be worked:

■ Steels up to 1,200 N/mm<sup>2</sup>

#### **Applications:**

Sharpening



#### **CHAIN SHARP CS-X chain saw sharpeners**

The CHAIN SHARP CS-X chain saw sharpener stands out due to its excellent file position, ergonomic shape and easier operation. The device provides a sharpening angle of 30°. The defined depth gauge distance can be found in the table.

#### Contents:

The chain saw sharpener consists of:

- One sharpener
- One depth gauge file
- Two Classic Line chain saw files

#### Advantages:

- Turn the device over to change from the right to the left tooth no conversion work required.
- Optimized shape for precise guidance and optimal sharpening results.
- Improved design makes it easy to replace the files.
- For simultaneously sharpening the saw teeth and adjusting the depth gauge.

#### **Ordering notes:**

- PFERD offers five types of the CHAIN SHARP CS-X chain saw sharpener adapted to different chain pitches.
- The sharpener is supplied with detailed operating instructions in a transparent, reusable plastic pouch which protects against damage and dirt.

#### PFERDVALUE:







Suitable for chain saw file diameter [mm]	Suitable for chain saw file diameter [inch]	EAN 4007220	Chain pitch [inch]	Depth gauge distance [mm]	Matching depth gauge file		Description
POS packaging							
3.2	1/8	943731	1/4 LP*	0.45	4132	1	CS-X-3,2
4.0	5/32	835913	3/8 LP*	0.65	4132	1	CS-X-4,0
4.8	3/16	835920	.325	0.65	4132	1	CS-X-4,8
5.16	13/64	835937	3/8	0.65	4132	1	CS-X-5,16
5.5	7/32	835944	.404	0.75	4132	1	CS-X-5,5

\* LP = Low Profile







### Chain saw sharpeners CHAIN SHARP





#### **CHAIN SHARP KSSG chain saw sharpeners**

You can convert the device for sharpening the right and left cutting teeth in a few steps. The device provides a sharpening angle of 35°. The defined depth gauge distance can be found in the table

#### Contents:

The chain saw sharpener consists of:

- One sharpener
- One Classic Line chain saw file
- One depth gauge file
- One ergonomic file handle FH 1 KSF

#### Advantages:

- Maximum precision for optimal sharpening results.
- For simultaneously sharpening the saw teeth and adjusting the depth gauge.

#### Ordering notes:

- Available in three types that are adapted to different chain pitches.
- The sharpener is supplied with detailed operating instructions in a transparent, reusable plastic pouch which protects against damage and dirt.

#### PFERDVALUE:



Suitable for chain saw file diameter [mm]	Suitable for chain saw file diameter [inch]	EAN 4007220	Chain pitch [inch]	Depth gauge distance [mm]	Matching depth gauge file		Description		
POS packaging									
4.0	5/32	005460	3/8 LP*	0.65	4131	1	KSSG 91-4,0		
4.8 / 5.5	3/16 , 7/32	005439	.325	0.65	4130	1	KSSG 90-4,8		
				005446	3/8	0.65	4130	1	KSSG 90-5,5

<sup>\*</sup> LP = Low Profile



#### **CHAIN SHARP CS-MT chain saw sharpeners**

The compact CHAIN SHARP CS-MT sharpening solution combines a chain saw file and a depth gauge file in one ergonomic tool. The defined elevation of the chain saw file makes sharpening the saw teeth easier and prevents the connecting links of the saw chain from being damaged. The side-mounted depth gauge file allows you to individually set the depth limit. The gauge provided gives depth spacings of 0.65 mm (.025") for harder wood or 0.75 mm (.030") for softer wood.

#### Contents:

The chain saw sharpener consists of:

- One sharpener
- One Classic Line chain saw file
- One depth limit file
- One ergonomic file handle
- One depth gauge

### Advantages:

- Compact sharpener.
- Depth gauge can be individually adjusted.
- Suitable for all common chain saw files.
- $\blacksquare$  Long tool life with PFERD files.

#### Ordering notes:

- Available in four designs for the most common chain pitches.
- The sharpener is supplied with detailed operating instructions in a belt pouch which protects against damage and dirt.





Suitable for chain saw file diameter [mm]	Suitable for chain saw file diameter [inch]	EAN 4007220	Chain pitch [inch]	Matching depth gauge file		Description
POS packaging						
4.0	5/32	098646	3/8 LP*	1213 ruk 150	1	CS-MT-4,0
4.8	3/16	098677	.325	1213 ruk 150	1	CS-MT-4,8
5.16	13/64	098684	3/8	1213 ruk 150	1	CS-MT-5,16
5.5	7/32	098707	.404	1213 ruk 150	1	CS-MT-5,5

<sup>\*</sup> LP = Low Profile



# Sharpening files Depth gauge files

#### **Depth gauge file for CHAIN SHARP CS-X**

Rectangular file with cut on two sides. Suitable for the CHAIN SHARP CS-X chain saw sharpener.

#### Advantages:

■ Stock removal rate is precisely tailored to the depth gauge.

Profile	Length [mm]	Length [inch]	Cut	EAN 4007220	Cross section [mm]	Suitable for		Description
4132	200	8	2	831335	9.0 x 6.0	CS-X-3,2, CS-X-4,0, CS-X 4,8, CS-X 5,16, CS-X 5,5	10	4132 200

#### Depth gauge files for **CHAIN SHARP KSSG**

Rectangular file with cut on two sides. Available in two different cross sections. Suitable for the CHAIN SHARP KSSG chain saw sharpener.

#### Advantages:

■ Stock removal rate is precisely tailored to the depth gauge.

Profile	Length [mm]	Length [inch]	Cut	EAN 4007220	Cross section [mm]	Suitable for		Description
4130	200	8	2	011218	9.0 x 6.0	KSSG 90-4,8, KSSG 90-5,5	10	4130 200
4131	200	8	2	011225	7.0 x 4.5	KSSG 91-4,0	10	4131 200

#### Flat chain saw files for depth gauges

Rectangular file, tanged with two round uncut edges and cut on two sides. Shape F according to DIN 7262. Flat chain saw files are used to file the depth gauges of saw chains.

#### Advantages:

■ Stock removal rate is precisely tailored to the depth gauge.

Profile	Length [mm]	Length [inch]	Cut 2 EAN 4007220	Cross section [mm]	Matching handle		Description
1213 ruk	150	6	011041	16.0 x 3.0	FH 3	10	1213 ruk 150 H2
	200	8	011058	20.0 x 3.5	FH 4/1	10	1213 ruk 200 H2





Wood files



PFERD quality files which are particularly suited to the coarse stock removal of wood.

#### **Advantages:**

- High stock removal rate.
- Good chip removal.

#### Materials that can be worked:

- Wood
- Plastics

#### **Applications:**

- Surface work
- Filing of radius areas
- Filing of half-round shapes
- Deburring
- Work on edges (chamfering, rounding)





#### **Wood files**

Half-round file with special file cut on two sides. Shape C according to DIN 7263. Version with tang.

Profile	Length [mm]	Length [inch]		Cross section [mm]	Matching handle		Description	
1159	200 250	8	006368 006382	20.0 x 6.0 25.0 x 7.0	FH 4/1 FH 4/1	10 10	1159 200 H2 1159 250 H2	





#### **Cabinet files**

Half-round file, tapered with special cut on two sides. Flatter and wider design in comparison to the half-round file. Shape F according to DIN 7263. Version with tang.

Profile	Length [mm]	Length [inch]	Cut 1 EAN 4007220	Cross section [mm]	Matching handle		Description
1158	200	8	009840	23.0 x 4.7	FH 4/1	5	1158 200 H1
	250	10	009857	29.0 x 6.0	FH 4/1	5	1158 250 H1







Wood rasps

PFERD quality rasps which are particularly suited to the coarse stock removal of wood.

#### **Advantages:**

- High stock removal rate.
- Good chip removal.

#### Materials that can be worked:

■ Wood

#### **Applications:**

- Deburring
- Surface work
- Chamfering
- Work on edges (chamfering, rounding)

#### **Ordering note:**


- Type POS is supplied with ergonomic file handle.
- Please specify the desired cut.

#### **PFERD**VALUE:

PFERDERGONOMICS recommends the ergonomic file handle for comfortable work.

#### Hand wood rasps

Rectangular file with cut on three sides, flat sides with rasp cut, one edge with file cut, one edge uncut. Shape A according to DIN 7263. Version with tang.




#### PFERDVALUE:



Profile	Length	Length	С	ut	Cross	Matching	Incl.	$\blacksquare$	Description
	[mm]	[inch]	1	2	section [mm]	handle	handle		
			EAN 4	007220					
Industrial pa	ackaging (w	ithout handle	e)						
1512	200	8	-	009550	20.0 x 6.5	FH 4/1	-	10	1512 200 H
	250	10	009567	009574	25.0 x 7.5	FH 4/1	-	10	1512 250 H
POS packag	ing (with ha	ndle)							
1512	200	8	-	542125	20.0 x 6.5	-	FH 4/1	5	PF 1512 200 H
	250	10	-	542132	25.0 x 7.5	-	FH 4/1	5	PF 1512 250 H

#### **Half-round wood rasps**

Half-round file, tapered with rasp cut on two sides. Shape C according to DIN 7263. Version with tang.



#### PFERDVALUE:



Profile	Length	Length		Cut		Cross	Matching	Incl.	$\square$	Description
	[mm]	[inch]		2	3	section [mm]	handle	handle		
			E	AN 400722	0					
Industrial	packaging	(without h	andle)							
1552	150	6	-	009598	-	16.0 x 6.0	FH 3	-	10	1552 150 H
	200	8	009611	009628	-	21.0 x 7.5	FH 4/1	-	10	1552 200 H
	250	10	009659	009666	009673	25.0 x 8.5	FH 4/1	-	10	1552 250 H
	300	12	009697	009703	-	30.0 x 10.0	FH 5/1	-	5	1552 300 H
POS packa	ging (with	handle)								
1552	150	6	-	542163	-	16.0 x 6.0	-	FH 3	5	PF 1552 150 H
	200	8	542187	542194	-	21.0 x 7.5	-	FH 4/1	5	PF 1552 200 H
	250	10	-	542217	-	25.0 x 8.5	-	FH 4/1	5	PF 1552 250 H

Wood rasps








#### Round wood rasps (1562)

Round file, tapered with circumferential rasp cut. Shape E according to DIN 7263. Version with tang. Suitable for work on radii and for filing profiles with inner radii.

#### PFERDVALUE:



Profile	Length [mm]	Length [inch]		Cross section	Matching handle	Incl. handle		Description
	[11111]	lincin	2	[mm]	Handle	nanuie		
			EAN 4007220					
Industrial page	ckaging (with	out handle)						
1562	200	8	009710	9.5	FH 4	-	10	1562 200 H2
	250	10	009727	11.5	FH 4	-	10	1562 250 H2
POS packagin	ng (with handl	e)						
1562	200	8	542224	9.5	-	FH 4	5	PF 1562 200 H2
	250	10	542231	11.5	-	FH 4	5	PF 1562 250 H2





#### Cabinet rasps (1558)

Half-round file, tapered with rasp cut on two sides. Shape D according to DIN 7263. Version with tang. Wider and flat than a half-round wood rasp. Suitable for work on surfaces, radii, half-round profiles and edges (chamfering and rounding).

Profile	Length	Length		Cut		Cross	Matching	$\Longrightarrow$	Description
	[mm]	[inch]	2	3	5	section [mm]	handle		
				EAN 4007220	)				
1558	200	8	009758	-	-	25.0 x 6.0	FH 4/1	5	1558 200 H
	250	10	009789	009796	009802	29.0 x 7.0	FH 4/1	5	1558 250 H
	300	12	009819	-	-	34.0 x 8.0	FH 5/1	5	1558 300 H



# Files and rasps for wood Hoof rasps

#### **Hoof plane**

Rectangular file, tanged and cut on four sides. One side fine, one side rough. Suitable for straightening the hoof surface, for finishing the hoof wall, for filing the toes and for work on the hoof nails after undercutting.



- Long tool life.
- Very good surface quality.
- Saves on labour and reduces the strain on the back.
- Comfortable filing for humans and animals.

#### Materials that can be worked:

wood, horn

#### **Recommendations for use:**

The PFERD hoof plane file can be used with commercial file handles in the corresponding sizes.

#### PFERDVALUE:





Profile	Length [mm]	Length [inch]	Cut milled EAN 4007220	Cross section [mm]	Matching handle		Description
3515	350	14	809631	44.0 x 6.0	FH 5	5	3515 350

#### Horse rasp, tanged type

Rectangular file, tanged and cut on four sides, one flat side with a rasp cut, one flat side with a cross cut, two edges with a file cut. Shape B according to DIN 7263.







#### Advantages:

■ Very robust tool.

Profile	Length [mm]	Length [inch]	Cut Rasp/filing cut 1 EAN 4007220	Cross section [mm]	Matching handle		Description
3510	350	14	009901	40.0 x 6.0	FH 5	5	3510 350 H1







## Special rasps



Special rasps from PFERD are used by numerous professionals in many industries for different applications. They are used for the processing of carved woodwork, plastics, relief ornaments, casting patterns and areas which are hard to reach.

#### **Advantages:**

- Universally suitable for many materials.
- Application-oriented versions.

#### Materials that can be worked:

- Wood
- Soft stone
- Plastics
- Horn



#### Sculptor's file rasp

Half-round file rasp with two curved ends, each with different cuts (file cut and rasp cut).

Profile	Length [mm]	Length [inch]	Cut 2 44007220		Description
3553	200	8	009932	5	3553 200 H2



#### Staircase maker's file rasp

File rasp with two half-round, curved ends with rasp cut on the outer radius and file cut on the inner radius.

Profil	e Length [mm]	Length [inch]	Cut 2		Description
355	250	10	009529	5	3554 250 H2



#### Staircase maker's rasp

Half-round, curved file body with rasp cut on the half-round side. Strongly curved, half-round profile allows you to work on various radii. Suitable for reworking handrails, ornaments, carved woodwork, sculptures and casting patterns.

Profile	Length	Length	Cut	$\overline{\square}$	Description
	[mm]	[inch]	2		
			EAN 4007220		
3556	250	10	009512	2	3556 250 H2



Needle rasps

#### **Needle rasps**

Needle rasps are ideal for use in hard-to-reach places, e.g. ornaments, casting patterns, carved woodwork and sculptures.

#### Materials that can be worked:

wood, soft stones, plastics, horn

#### **Applications:**

deburring, surface work, work on edges, chamfering, rounding

#### Recommendations for use:

■ Needle rasps have forged shanks and can be used with and without a file handle.

2501			
2502	N.C.		****
2506			#***
2507			X.
2508	NE	TOWNSON CONTROL OF THE PROPERTY OF THE PARTY	
2510	259		O

<b></b>				01
***** <u>***</u> *			N.C.	02
####				06
<u> </u>				07
	TOTAL CONTROL STATES OF THE ST	- 6	NG.	80
$\bigcirc$			259	10

Profile	Length [mm]	Length [inch]		Shank dia. [mm]		Description
			EAN 4007220			
hand	140	5 1/2	346013	3.0	12	2501 140 H2
half-round	140	5 1/2	346051	3.0	12	2502 140 H2
flat	140	5 1/2	346006	3.0	12	2506 140 H2
three square	140	5 1/2	346020	3.0	12	2507 140 H2
square	140	5 1/2	346037	3.0	12	2508 140 H2
round	140	5 1/2	346044	3.0	12	2510 140 H2

### Needle rasp set

#### Needle rasp set

Contains an application-oriented selection of needle rasps for work in hard-to-reach areas.

#### Contents:

Six needle rasps:

- flat (2506)
- hand (2501)
- three square (2507)
- square (2508)
- round (2510)
- half-round (2502)

#### Advantages:

■ Can be used with or without a file handle thanks to the forged shanks.

#### Materials that can be worked:

wood, soft stones, plastics, horn

#### Applications:

deburring, surface work, work on edges, chamfering, rounding

#### Ordering notes:

■ Supplied in a clearly structured plastic pouch to protect against dirt and damage.



Length	Length	Swiss cut	Contents		Description
[mm]	[inch]	2	[pcs.]		
		EAN 4007220			
140	5 1/2	235522	6	1	2527 140 H2

#### General information



PFERD precision files meet the highest demands when it comes to geometric accuracy, cutting performance and service life. Compared to machinist's files, precision files are more exact in their geometry.

They are used in jig and tool construction, especially for the manufacture of tools for the punching, forming, forging, embossing of series items etc.

In addition, precision files are suitable for assembling tasks and building complex devices and machines to the highest precision standards. For all precision files, the cross section is measured at the uncut part of the file.

#### **Table of cuts for precision files**

#### Number of cuts per cm

Cuts	Swiss cut						
	00	0	1	2	3	4	5
Type of file	[Cuts/cm]						
Tang files No. 800–875 100, 150 and 200 mm	16	20	25	31	38	46	56
Tang files No. 800–875 250 mm	12	16	20	25	31	38	46
CORINOX files No. 800–860 150 and 200 mm	16	20	-	31	-	-	-
Needle files No. 2401–2416	20	25	31	38	46	56	_
CORINOX needle files No. 2301–2310	_	25	-	38	-	_	-
Handy files No. 2601–2610	16	-	25	-	-	-	-
Riffler files No. 900P–996P 150 mm	-	25	-	38	-	56	-
Riffler files No. 710P–775P 180 mm	-	16	-	25	-	-	-
Riffler files No. 410P–480P 300 mm	-	12	-	20	-	-	-





Precision files, tanged



#### Precision files, tanged

Small, handy files for use on delicate workpieces.

#### Advantages:

- Small, handy design.
- Particularly suitable for work on small and delicate workpieces.


#### Materials that can be worked:


steels up to 1,200 N/mm<sup>2</sup>

#### Applications:

deburring, surface work, work on edges (chamfering, rounding), fine finishing

#### Ordering notes:

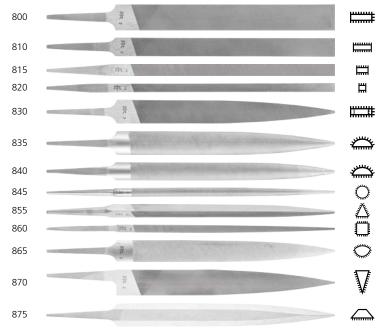

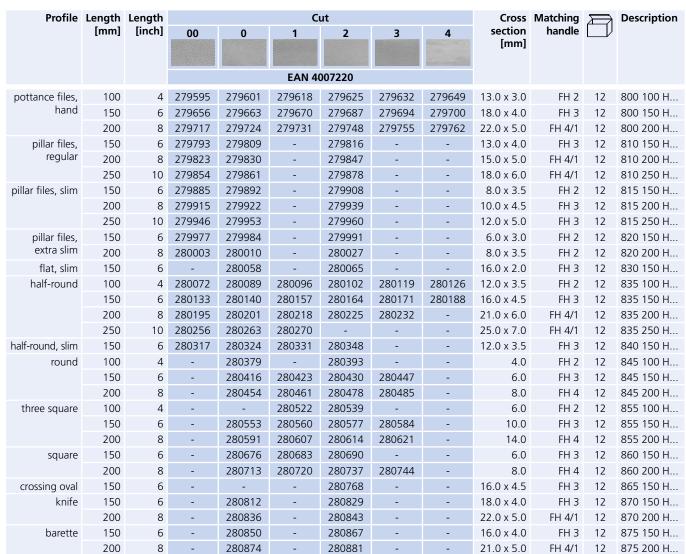

## **CORINOX** files





#### **CORINOX files**

CORINOX files have an exceptional surface hardness grade of 1,200 HV (Vickers scale) and can be used for precise filing on very small and delicate components.

#### Advantages:

- Extremely wear-resistant and sturdy thanks to high surface hardness.
- Can also be used on materials that are difficult to file.
- Do not clog up.
- Chips can easily be removed by knocking the tool gently against a hard object.

#### Materials that can be worked:

stainless steel (INOX), high-temperatureresistant materials, hard non-ferrous metal, fibre-reinforced duroplastics (GRP, CRP)

#### Applications:

deburring, surface work, work on edges (chamfering, rounding), fine finishing

#### Ordering notes:

Profile	Length	Length		Swiss cut		Cross	Matching	$\Rightarrow$	Description
	[mm]	[inch]	00	0	2	section [mm]	handle		
				EAN 4007220	)				
pottance	150	6	304082	304099	-	18.0 x 4.0	FH 3	12	COR 800 150 H
files, hand	200	8	304105	304112	304129	22.0 x 5.0	FH 4/1	12	COR 800 200 H
	250	10	669464	669471	669488	25.0 x 6.0	FH 4/1	12	COR 800 250 H
pillar files,	150	6	304136	304143	-	13.0 x 4.0	FH 3	12	COR 810 150 H
regular	200	8	304150	304167	317785	15.0 x 5.0	FH 4/1	12	COR 810 200 H
tang files,	150	6	=	304174	-	16.0 x 4.5	FH 3	12	COR 835 150 H
half-round	200	8	-	304181	317792	21.0 x 6.0	FH 4/1	12	COR 835 200 H
round	200	8	-	304198	317808	8.0	FH 4	12	COR 845 200 H
three square	200	8	-	304211	317815	14.0	FH 4	12	COR 855 200 H
square	150	6	-	304204	317822	6.0	FH 3	12	COR 860 150 H





## **Precision files** CORINOX needle files

#### **CORINOX** needle files

CORINOX needle files have an exceptional surface hardness grade of 1,200 HV (Vickers scale) and can be used to file very small and delicate components with precision.

#### Advantages:

- Extremely wear-resistant and sturdy thanks to high surface hardness.
- Can also be used on materials that are difficult to file.
- Do not clog up.
- Chips can easily be removed by knocking the tool gently against a hard object.
- Can be used with or without a file handle thanks to the forged tang.


#### Materials that can be worked:

stainless steel (INOX), high-temperatureresistant materials, hard non-ferrous metal, fibre-reinforced duroplastics (GRP, CRP)

#### **Applications:**

deburring, surface work, work on edges (chamfering, rounding), fine finishing

#### Ordering notes:

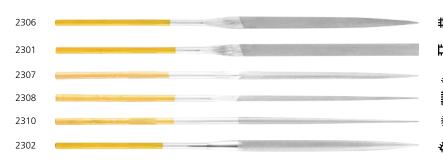



Profile	Length	Length	Swis	s cut	Shank dia.	Cross	$\Longrightarrow$	Description
	[mm]	[inch]	0	2	[mm]	section [mm]		
			EAN 4	007220				
flat	180	7	346532	346549	3.5	6.0 x 1.5	12	COR 2306 180 H
hand	180	7	346556	346570	3.5	6.0 x 1.5	12	COR 2301 180 H
three square	180	7	346587	346594	3.5	4.1	12	COR 2307 180 H
square	180	7	346600	346648	3.5	2.7	12	COR 2308 180 H
round	180	7	346624	346662	3.5	3.5	12	COR 2310 180 H
half-round	180	7	346686	346716	3.5	6.0 x 2.0	12	COR 2302 180 H



#### Needle files





#### **Needle files**

PFERD needle files are ideally suitable for work on the smallest surfaces, breakthroughs, geometries, profiles and radii.

#### Advantages:

■ Can be used with or without a needle file handle thanks to the forged tang.

#### Materials that can be worked:

steels up to 1,200 N/mm<sup>2</sup>

#### Applications:

deburring, fine finishing


#### Ordering notes:

- Needle file cuts 00, 0, 1, 2, 3 and 4, which are not listed in the table, are not available from stock. The delivery time for these files is therefore around 8 weeks.
- Please specify the desired cut.

Profile	Length	Length			C	ut			Shank	Cross	$\Longrightarrow$	Description
	[mm]	[inch]	00	0	1	2	3	4	dia.	section		
									[mm]	[mm]		
				60F68605466575766008	EAN 40	007220						
flat	140	5 1/2	-	237458	237465	237472	-	-	3.0	5.1 x 1.3	12	2406 140 H
	160	6 1/4	-	237489	237496	237502	237519	-	3.25	5.5 x 1.4	12	2406 160 H
	180	7	237526	237533	-	345979	-	-	3.5	6.0 x 1.5	12	2406 180 H
hand	140	5 1/2	-	383858	383872	383896	383919	-	3.0	5.1 x 1.3	12	2401 140 H
	160	6 1/4	-	383933	383957	383971	237168	-	3.25	5.5 x 1.4	12	2401 160 H
	180	7	384015	237182	237199	384077	-	-	3.5	6.0 x 1.5	12	2401 180 H
	200	8	237212	384114	237236	235898	-	-	3.75	6.4 x 1.6	12	2401 200 H
crossing oval	140	5 1/2	-	237328	237335	237342	-	-	3.0	4.5 x 1.8	12	2403 140 H
	160	6 1/4	-	237359	237366	237373	237380	-	3.25	5.2 x 2.3	12	2403 160 H
	180	7	-	237397	237410	237403	-	-	3.5	5.7 x 2.5	12	2403 180 H
three square	140	5 1/2	-	237700	237717	237724	237731	-	3.0	3.5	12	2407 140 H
	160	6 1/4	-	237748	237755	237762	237779	-	3.25	3.7	12	2407 160 H
	180	7	237786	237793	-	237809	237816	-	3.5	4.1	12	2407 180 H
	200	8	237823	237830	-	237847	237854	-	3.75	4.4	12	2407 200 H
square	140	5 1/2	-	238073	238080	238097	238103	-	3.0	2.4	12	2408 140 H
	160	6 1/4	-	238110	238127	238134	238141	-	3.25	2.5	12	2408 160 H
	180	7	238158	238165	-	238172	-	-	3.5	2.7	12	2408 180 H
	200	8	238196	238202	-	238219	-	-	3.75	3.0	12	2408 200 H
round	140	5 1/2	-	238226	238233	238240	-	238257	3.0	3.0	12	2410 140 H
	160	6 1/4	-	238264	238271	238288	-	238295	3.25	3.25	12	2410 160 H
	180	7	345986	238301	238318	238325	238332	-	3.5	3.5	12	2410 180 H
	200	8	345993	238349	238356	238363	238370	-	3.75	3.75	12	2410 200 H
knife	140	5 1/2	-	237571	237588	237595	-	-	3.0	5.5 x 1.5	12	2405 140 H
	160	6 1/4	-	237601	237618	237625	-	-	3.25	5.8 x 1.7	12	2405 160 H
	180	7	237649	237656	-	237663	-	-	3.5	6.2 x 1.8	12	2405 180 H
half-round	140	5 1/2	-	237861	237878	237885	237892	-	3.0	5.0 x 1.7	12	2402 140 H
	160	6 1/4	-	237908	237915	237922	237939	-	3.25	5.7 x 1.8	12	2402 160 H
	180	7	237946	237953	-	237960	237977	-	3.5	6.0 x 2.0	12	2402 180 H
	200	8	237984	237991	-	238004	238011	-	3.75	6.4 x 1.8	12	2402 200 H
barette	140	5 1/2	-	237175	384039	384053	-	-	3.0	5.0 x 2.1	12	2411 140 H
	160	6 1/4	-	237205	384091	237229	384138	-	3.25	5.3 x 2.1	12	2411 160 H
	180	7	-	237250	237267	237274	-	-	3.5	5.6 x 2.3	12	2411 180 H
flat with	160	6 1/4	-	-	-	238400	-	-	3.25	5.5 x 1.4	12	2415 160 H
rounded edges	180	7	-	238417	-	-	-	-	3.5	6.0 x 1.5	12	2415 180 H

Continued on next page



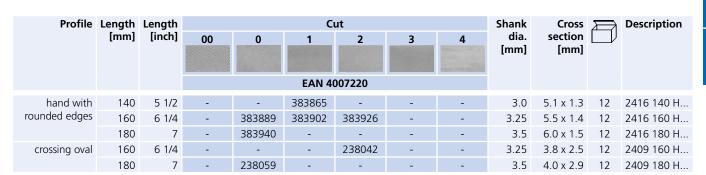

#### Needle file sets

#### **Needle file sets**

Contains an application-oriented selection of needle files.

#### Contents:

- 12 needle files:
- flat (2406)
- hand (2401)
- crossing oval (2403)
- three square (2407)
- square (2408)
- round (2410)
  knife (2405)

- half-round (2402)
- barrette (2411)
- flat with round edges (2415)
- hand with round edges (2416)
- crossing oval round-oval (2409)

#### Ordering notes:

- Supplied in a PVC plastic pouch or a practical plastic box.
- Please specify the desired cut.



266



NFB

Length [mm]	Length [inch]	0	Swiss cut 1 EAN 4007220	2	Contents [pcs.]		Description
140	5 1/2	-	235539	-	12	1	266/14 P 140 H
160	6 1/4	-	235553	-	12	1	266/16 P 160 H
180	7	235560	-	-	12	1	266/18 P 180 H
200	8	235577	-	-	12	1	266/20 P 200 H
140	5 1/2	-	345955	345962	12	1	NFB 2492 140 H
160	6 1/4	-	392232	235515	12	1	NFB 2493 160 H

#### Needle file set

Contains an application-oriented selection of PFERD needle files.

#### Contents:

6 needle files:

■ flat (101) ■ hand (102)

hand (102)square (105)three square (104)round (106)



Supplied in a handy box to protect against dirt and damage.



Length [mm]	Length [inch]	Swiss cut  1  EAN 4007220	Contents [pcs.]		Description
160	6 1/4	009222	6	1	PF 263 160 H1

## Handy files







#### **Handy files**

Precision files similar to needle files. Suitable for work on the smallest areas of metals and plastics that are hard to reach, e.g. in tool and mould construction for refining pressing, forging and casting tools.



#### Advantages:

- Precise shape with a slim, fine design.
- Highly tapered.
- The high level of robustness enables a higher operating pressure.
- Can be used without a file handle thanks to the forged tang.

#### Materials that can be worked:

steels up to 1,200 N/mm<sup>2</sup>, plastics

#### Applications:

deburring, fine finishing, surface work, work on edges (chamfering, rounding)

#### Ordering notes:

■ Please specify the desired cut.

Profile	Length	Length	Swis	s cut	Cross		Description
	[mm]	[inch]	00	00 1			
			EAN 40	007220			
hand	215	8 1/2	346372	346389	10.3 x 2.8	12	2601 215 H
three square	215	8 1/2	346396	346402	10.0	12	2607 215 H
square	215	8 1/2	346419	346426	6.0 x 6.0	12	2608 215 H
half-round	215	8 1/2	346457	346464	12.8 x 3.7	12	2602 215 H

## Handy file sets



#### Handy file sets

Contains an application-oriented selection of handy files for work on the smallest areas that are hard to reach.

#### Contents:

Five handy files:

- hand (2601)
- three square (2607)
- square (2608)
- round (2610)
- half-round (2602)

#### Ordering notes:

- Supplied in a plastic pouch to protect against dirt, corrosion and damage.
- Please specify the desired cut.

Length [mm]	Length [inch]	Swis 00 EAN 40	s cut 1 007220	Contents [pcs.]		Description
215	8 1/2	346488	346501	5	1	2627 215 H



Riffler files, riffler rasps



#### Riffler files series 901P-952P

Length 150 mm, smallest type of riffler files.


#### Advantages:

- Can be used with or without riffler file holder.
- Width, application-oriented product selection.

#### Materials that can be worked:

steels up to 1,200 N/mm<sup>2</sup>


#### Ordering notes:

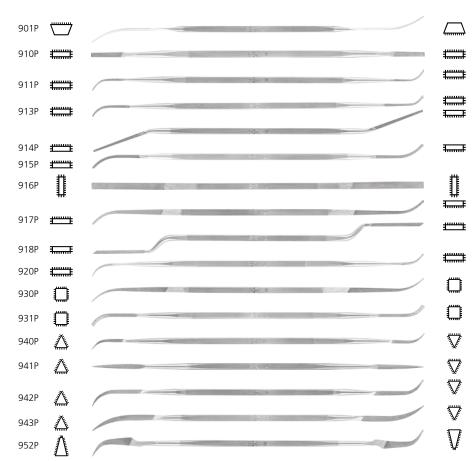

Profile	Length	Length	Swis	s cut	Cross	Suitable	$\supset$	Description
	[mm]	[inch]	2	4	section [mm]	arbors		
			EAN 40	007220				
901P	150	6	014950	-	4.0 x 1.3	RFH 150	12	901P 150 H
910P	150	6	-	346099	2.3 x 1.2	RFH 150	12	910P 150 H
911P	150	6	014974	-	2.3 x 1.2	RFH 150	12	911P 150 H
913P	150	6	014998	-	2.7 x 1.5	RFH 150	12	913P 150 H
914P	150	6	015018	-	3.5 x 1.5	RFH 150	12	914P 150 H
915P	150	6	346105	-	3.5 x 1.5	RFH 150	12	915P 150 H
916P	150	6	015032	-	3.2 x 1.5	RFH 150	12	916P 150 H
917P	150	6	015056	-	3.2 x 1.5	RFH 150	12	917P 150 H
918P	150	6	015070	-	3.8 x 1.7	RFH 150	12	918P 150 H
920P	150	6	346112	-	4.9 x 1.5	RFH 150	12	920P 150 H
930P	150	6	015094	-	3.2 x 3.2	RFH 150	12	930P 150 H
931P	150	6	346129	-	1.7 x 1.7	RFH 150	12	931P 150 H
940P	150	6	346136	-	1.7	RFH 150	12	940P 150 H
941P	150	6	346143	-	2.2	RFH 150	12	941P 150 H
942P	150	6	015117	015124	2.6	RFH 150	12	942P 150 H
943P	150	6	346150	398708	3.0	RFH 150	12	943P 150 H
952P	150	6	015131	015148	1.4 x 4.2	RFH 150	12	952P 150 H

## Riffler files, riffler rasps



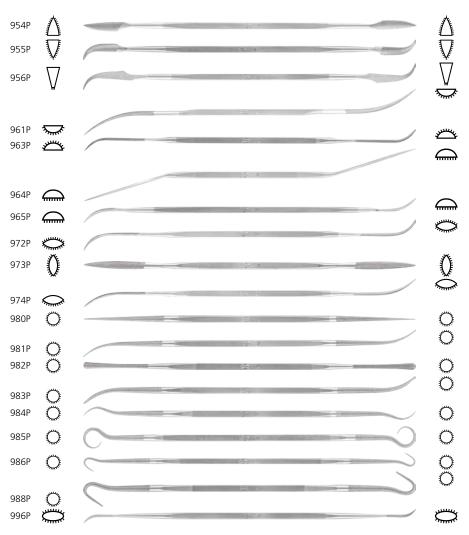

#### Riffler files series 954P-996P

Length 150 mm, smallest type of riffler files.

#### Advantages:

- Can be used with or without riffler file holder.
- Width, application-oriented product selection.

#### Materials that can be worked:

steels up to 1,200 N/mm<sup>2</sup>

#### Ordering notes:

Profile	Length	Length	Swis	s cut	Cross	Suitable	$\Longrightarrow$	Description
	[mm]	[inch]	2 FΔN 40	4 007220	section [mm]	arbors		
25.15	150			007220		5511.450		05 15 150 1
954P	150	6	015155	-	1.5 x 4.0	RFH 150	12	954P 150 H
955P	150	6	-	346167	1.5 x 4.0	RFH 150	12	955P 150 H
956P	150	6	346174	-	1.6 x 4.1	RFH 150	12	956P 150 H
961P	150	6	346181	-	4.1 x 2.4	RFH 150	12	961P 150 H
963P	150	6	015179	-	4.6 x 1.3	RFH 150	12	963P 150 H
964P	150	6	346198	-	4.5 x 1.4	RFH 150	12	964P 150 H
965P	150	6	015193	-	5.2 x 1.5	RFH 150	12	965P 150 H
972P	150	6	015216	-	3.6 x 2.1	RFH 150	12	972P 150 H
973P	150	6	346204	-	3.6 x 2.1	RFH 150	12	973P 150 H
974P	150	6	015230	-	3.6 x 2.1	RFH 150	12	974P 150 H
980P	150	6	346211	-	3.5	RFH 150	12	980P 150 H
981P	150	6	015254	015261	3.5	RFH 150	12	981P 150 H
982P	150	6	015278	-	3.0	RFH 150	12	982P 150 H
983P	150	6	346228	-	3.2	RFH 150	12	983P 150 H
984P	150	6	346235	-	3.2	RFH 150	12	984P 150 H
985P	150	6	015292	015308	3.2	RFH 150	12	985P 150 H
986P	150	6	346259	-	2.6	RFH 150	12	986P 150 H
988P	150	6	346273	-	3.2	RFH 150	12	988P 150 H
996P	150	6	345696	-	2.2 x 1.4	RFH 150	12	996P 150 H



# **Precision files**Riffler files, riffler rasps

#### Riffler files series 710P-795P

Length 180 mm, medium-sized type of riffler files.


#### Advantages:

- Can be used with or without riffler file holder.
- Width, application-oriented product selection.

#### Materials that can be worked:

steels up to 1,200 N/mm<sup>2</sup>

#### Ordering notes:

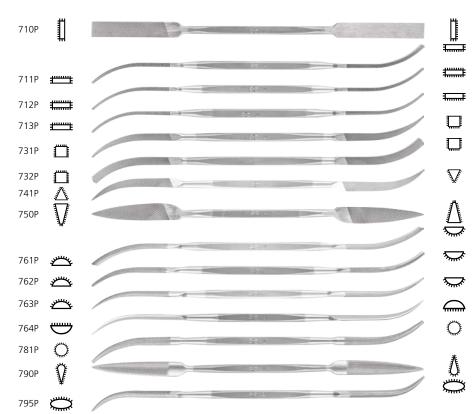


Profile	Length	Length	Swi	s cut	Cross	Suitable		Description
	[mm]	[inch]	0	2	section [mm]	arbors		
			EAN 4	007220				
710P	180	7	014752	014769	8.5 x 2.5	RFH 180	12	710P 180 H
711P	180	7	014776	014783	8.5 x 2.5	RFH 180	12	711P 180 H
712P	180	7	014790	014806	8.2 x 2.5	RFH 180	12	712P 180 H
713P	180	7	345702	345719	8.2 x 2.5	RFH 180	12	713P 180 H
731P	180	7	014813	014820	4.5 x 4.5	RFH 180	12	731P 180 H
732P	180	7	345726	345733	4.5 x 4.5	RFH 180	12	732P 180 H
741P	180	7	014837	014844	6.5	RFH 180	12	741P 180 H
750P	180	7	014851	014868	9.5 x 2.5	RFH 180	12	750P 180 H
761P	180	7	345740	345757	9.2 x 3.2	RFH 180	12	761P 180 H
762P	180	7	-	014882	9.3 x 3.2	RFH 180	12	762P 180 H
763P	180	7	345764	345771	9.5 x 3.3	RFH 180	12	763P 180 H
764P	180	7	=	345788	9.5 x 3.3	RFH 180	12	764P 180 H
781P	180	7	014912	014929	5.0	RFH 180	12	781P 180 H
790P	180	7	-	345795	8.5 x 4.0	RFH 180	12	790P 180 H
795P	180	7	-	014943	8.0 x 4.3	RFH 180	12	795P 180 H



## Riffler files, riffler rasps



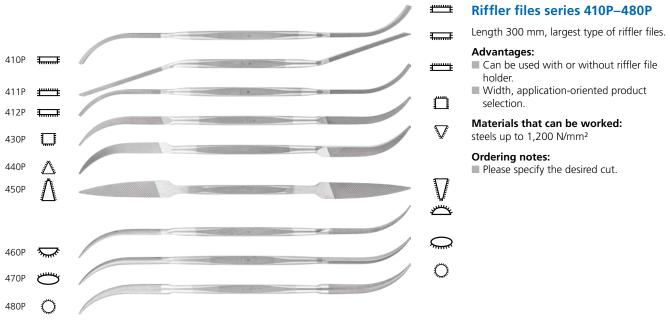

Profile	Length	Length	Swis	s cut	Cross	$   \equiv   $	Description
	[mm]	[inch]	0	2	section [mm]		
			EAN 4	007220			
410P	300	12	345818	345825	15.0 x 4.0	6	410P 300 H
411P	300	12	345924	345931	15.0 x 4.4	6	411P 300 H
412P	300	12	345801	-	15.0 x 4.4	6	412P 300 H
430P	300	12	345863	345870	8.0 x 8.0	6	430P 300 H
440P	300	12	345849	345856	12.0 x 12.0	6	440P 300 H
450P	300	12	345900	-	15.0 x 12.0	6	450P 300 H
460P	300	12	345917	-	15.0 x 6.0	6	460P 300 H
470P	300	12	345832	-	14.0 x 7.0	6	470P 300 H
480P	300	12	345887	345894	10.0	6	480P 300 H



#### Set of riffler files PF 900

Contains an application-oriented selection of riffler files.

#### Advantages:

- Can be used with or without riffler file holder.
- Width, application-oriented product selection.

#### Materials that can be worked:

steels up to 1,200 N/mm<sup>2</sup>

#### Ordering notes:

■ Matching arbor = RFH 150

Length [mm]	Length [inch]	Swiss cut 2 EAN 4007220	Contents [pcs.]	Contents		Description
150	6	009239	4	914P 930P 963P 981P	1	PF 900



## **Precision files** Riffler files, riffler rasps

#### Riffler rasps series 701P-708P


190 mm long riffler file with precise Swiss rasp

#### Advantages:

- Can be used with or without riffler file holder.
- Width, application-oriented product selection.

#### Materials that can be worked:

steels up to 1,200 N/mm<sup>2</sup>

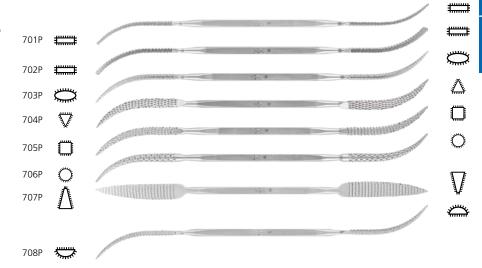

Profile	Length [mm]	Length [inch]	Swiss cut 0	Cross section [mm]	Suitable arbors		Description
			EAN 4007220				
701P	190	7 1/2	346280	8.2 x 3.3	RFH 180	12	701P 190 H0
702P	190	7 1/2	346297	8.1 x 3.5	RFH 180	12	702P 190 H0
703P	190	7 1/2	346303	7.6 x 4.4	RFH 180	12	703P 190 H0
704P	190	7 1/2	346310	6.4	RFH 180	12	704P 190 H0
705P	190	7 1/2	346327	4.9	RFH 180	12	705P 190 H0
706P	190	7 1/2	346334	5.5	RFH 180	12	706P 190 H0
707P	190	7 1/2	346341	9.2 x 3.6	RFH 180	12	707P 190 H0
708P	190	7 1/2	346358	9.3 x 3.8	RFH 180	12	708P 190 H0

#### Riffler rasp set 720P

Contains an application-oriented selection of riffler rasps.

#### Advantages:

- Can be used with or without riffler file holder.
- Width, application-oriented product selection.

#### Materials that can be worked:

steels up to 1,200 N/mm<sup>2</sup>

#### **Ordering notes:**

- Supplied in a plastic pouch to protect against dirt, corrosion and damage.
- Matching arbor = RFH 180




Length [mm]	Length [inch]	Swiss cut 0 EAN 4007220	Contents [pcs.]	Contents		Description
190	7 1/2	535905	8	701P 702P 703P 704P 705P 706P 707P 708P	1	720P



## File handles, file sleeves, file brush

#### File handles





#### **Ergonomic file handles**

Ergonomic file handles for comfortable and safe work.

#### Advantages:

- Protects hands against sharp edges and corners
- Ergonomic shape with optimized haptics.
- Files do not roll away.
- Soft plastic on the outside with a hard, stable inner part.
- Without plasticizer.

#### **Ordering notes:**

Available in different types and two different packaging units.

#### PFERDVALUE:



Suitable for file length [mm]	EAN 4007220	Overall length [mm]	Suitable for		Description
100, 125, 150	535714	110	key files	10	FH 2-10
	535721	110	key files	100	FH 2-100
	535738	110	all tangs	10	FH 3-10
	535745	110	all tangs	100	FH 3-100
200, 250	535752	115	profiles three square, square, round, special profiles	10	FH 4-10
	535769	115	profiles three square, square, round, special profiles	100	FH 4-100
	535776	115	profiles hand, flat, half-round	10	FH 4/1-10
	535783	115	profiles hand, flat, half-round	100	FH 4/1-100
300, 350	535790	115	profiles three square, square, round, special profiles	10	FH 5-10
	535806	115	profiles three square, square, round, special profiles	100	FH 5-100
	535813	115	profiles hand, flat, half-round	10	FH 5/1-10
	535820	115	profiles hand, flat, half-round	100	FH 5/1-100



#### **Plastic file handles**

Plastic file handles for good guidance and power transmission.

#### Advantages:

- Wide collar guarantees fatigue-free work and increases safety.
- Good force transmission and control of the file
- Air chambers help absorb hand moisture.
- File handle made from sturdy plastic.
- Contains no plasticizers.

#### Ordering notes:

Available in four different types and two different packaging units.

Suitable for file length [mm]	4007220	Overall length [mm]	Suitable for		Description
100, 125, 150	015476	90	key files	10	PH 08/10
	301890	90	key files	100	PH 08/100
	015483	90	all tangs	10	PH 09/10
	301906	90	all tangs	100	PH 09/100
200, 250	015490	110	all tangs	10	PH 11/10
	301913	110	all tangs	100	PH 11/100
300, 350	015506	120	all tangs	10	PH 13/10
	301920	120	all tangs	100	PH 13/100



# PFERD

## File handles, file sleeves, file brush

Quick-mounting handles

#### Plastic file handle, quick-mounting type

Quick-mounting handle for needle files, diamond files and smaller machinist's and precision files.



#### Advantages:

Reliably clamps the file tangs into the handle by simply twisting the two halves of the handle.

Suitable for file length [mm]	Suitable for tang diameter [mm]	EAN 4007220	Overall length [mm]		Description
140, 160, 180, 200	3.0/3.25/3.5/3.75	806555	90	10	SH 220

#### Needle file holder

Quick-mounting handles for needle files with 3-4.5 mm tang diameter.

#### Advantages:

- Handy and lightweight.
- Available in two materials.

2007	PER	MINIMUM	

NFH 212

NFH 211



Suitable for	Suitable for tang diameter [mm]	EAN 4007220	Overall length [mm]		Description
Needle file diameter	3–4.5	267783	100	10	NFH 211-3 K
3–4.5 mm		669532	92	10	NFH 212

#### Riffler file holder

#### Riffler file holder

Riffler file holder for files in 150 and 180 mm lengths.

#### Advantages:

- Safe and optimum file control.
- One of the file points is always covered safely by the file handle.
- Quick and easy tool changes.
- Contains no plasticizers.
- Reusable.



Suitable for file length [mm]	EAN 4007220		Description
150	015322	10	RFH 150
180	015346	10	RFH 180

## File handles, file sleeves, file brush

Plastic sleeves, empty





#### Plastic sleeves, empty

Plastic sleeves for storing individual files without a handle.

#### Advantages:

- Enables the file to be hung up by the eyelet.
- Protects against damage, dirt and corrosion.

Suitable for file length [mm]	4007220		Description
150	015520	25	KH 150
200	015537	25	KH 200
250	015544	25	KH 250
300	015551	25	KH 300

#### File brush



#### File brush

The file brush is for easy cleaning of clogged files. Comes with a robust handle made from wood and wear-resistant steel wire.

Advantages:	Applications:
Easy cleaning.	cleaning
■ Long tool life.	

Length [mm]	Length [inch]	EAN 4007220		Description
232	9.2	015315	5	HBF 10 ST 0,15





## Hand deburrer Hand deburrer

#### **Hand deburrer**

Hand deburrer for efficient deburring, chamfering and reworking of different materials and contours. Hard-to-reach areas, bores, inner and outer diameters, thread and grooves can be worked on effortlessly by hand.

#### PFERD offers:

- Three **deburring blades** for work on steel, aluminium, non-ferrous metals, cast iron, plastics and other soft materials.
- One mini blade for general work on the smallest geometries made of various materials
- Two rotatable deburring countersinks for general work on bores made of various materials.

#### Advantages:

- Three different, easily changeable deburrers (blades, mini-blades and countersinks).
- Easy to control and use with the special holder.
- Outstanding adjustment to the workpiece contours.
- The pivot-mounted adapter system makes handling and changing the deburrer very easy.
- Ergonomic file handle protects hands against sharp edges and prevents the tool from rolling away.

# H 4 BS 1010 BS 1018 BS 2010 BD 5010 BC 1041 BC 1651





Dia. [mm]	EAN 4007220	Use for		Description	
Holder for hand debur	Holder for hand deburrer				
-	807897	all types	1	H 4	
<b>Deburring blades</b>					
3	807903	steel, aluminium	10	BS 1010	
	807910	plastics, other soft materials	10	BS 1018	
	807927	non-ferrous metals, cast iron	10	BS 2010	
Mini-blade					
3	807934	general use	1	BD 5010	
Deburring countersink					
3	807941	general use	1	BC 1041	
	807958	general use	1	BC 1651	



## Quality tools from a single source





Catalogue section 1

Files



Catalogue section 4

Fine grinding and polishing tools



Catalogue section 7

Cut-off wheels for stationary applications



Catalogue section 2

Milling tools



**Catalogue section 5** 

Diamond and CBN tools



**Catalogue section 8** 

Industrial power brushes



**Catalogue section 3** 

Mounted points



Catalogue section 6

Cut-off wheels, flap discs and grinding wheels



**Catalogue section 9** 

Tool drives